




# 2025

## STATE OF LIGHT

Vol. 9.2  
March 20, 2026

**DVI**<sup>®</sup>  
LIGHTING

# GLOSSARY OF TERMS

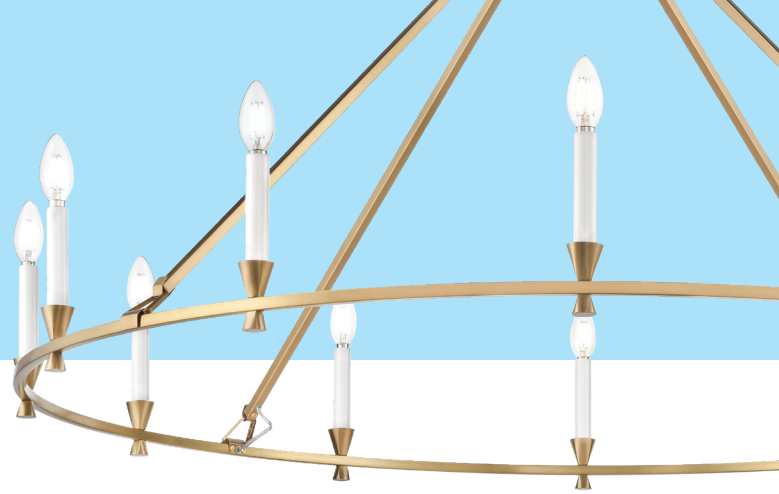

## ANSI

American National Standards Institute, a publisher of standards for US products and services. ANSI also coordinates national and international standards, allowing US products and services to be used elsewhere.

## BASE

The part of the bulb that connects to the lighting fixture, providing both physical support and electric power for the bulb. A bulb and fixture can only be used together if the bulb base matches the fixture socket. The bases of most residential bulbs use either a screw or multiple pins. A bulb can have more than one base: for example, fluorescent tubes have one on each end.

## BEAM ANGLE

Beam angle, also known as beam spread, is a measure of the distribution of light emitted by an LED chip or filament. In most cases, with no hindrance such as reflectors or lenses, the beam angle is 360 degrees since light can shine equally in all directions. However when optics are employed, the light distribution changes. For example, consider a spotlight versus a floodlight.

## COLOR RENDERING INDEX (CRI)

A metric used to describe how faithfully a light source can render the true colors of objects and spaces, where natural light sources like the sun have a perfect index of 100. Using lamps with a high CRI value is very important in high-end interior design, as they enhance the visibility of décor and fine details.

## DAMP RATING

A lamp intended for use in damp locations have passed a 48 hour 93±5% humidity test at a temperature of 25±2°C followed by a dielectric test, and be constructed with materials satisfying the damp environmental rating. Examples of applications (but not limited to) include steam rooms (dependant on maximum sustained temperatures) and outdoor luminaires that have a covered bulb preventing water contact.

## EMERGENCY LAMPS


Lamps intended for use in emergency signage applications that are either constantly illuminated, or illuminated in case of power failure. Subjected to a minimum light level requirement as per local fire protection codes.

## ENCLOSED RATING

Lamps carrying a 'totally enclosed' rating have been tested in accordance with UL1993's enclosed apparatus and have passed a temperature test that allows installation into fully sealed luminaires with no exposure to external environments such as outdoor fixtures.

## KELVIN (K)

Measurement unit for temperature, used in the lighting industry to indicate the correlated color temperature (CCT) of light sources.

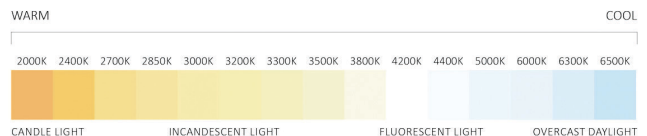

## LUMENS

Measurement unit for the lighting output, or brightness, of lamps or fixtures. The total lumens emitted and their spatial distribution are of paramount importance when creating appealing and luxurious indoor spaces. In lighting, lumens can be compared to miles traveled and watts can be compared to fuel consumption.

## WET RATING

A lamp intended for use in wet locations have passed a water spray test, a 48 hour 93±5% humidity test at a temperature of 25±2°C followed by a dielectric test, a drop test conducted while device has been cooled to -35, and be constructed with materials satisfying the wet environmental rating. Examples of applications (but not limited to) include exposed bulb garden lights or high-sustained humidity areas.

# NEW TO THIS CATALOGUE

## IVORY BULBS

STOCK CODE DESCRIPTION

E12 C35	DC3530W6A	6W 600LM 3000K 80CRI CLEAR
	DC3535W6A	6W 600LM 3500K 80CRI CLEAR
	DC3540W6A	6W 600LM 4000K 80CRI CLEAR
	DC3550W6A	6W 600LM 5000K 80CRI CLEAR

E12 G16	DG1630W6A	6W 600LM 3000K 80CRI CLEAR
	DG1640W6A	6W 600LM 4000K 80CRI CLEAR
	DG1650W6A	6W 600LM 5000K 80CRI CLEAR
	DG1630WP4A	4W 375LM 3000K 80CRI OPAL
	DG1640WP4A	4W 375LM 4000K 80CRI OPAL

E12 S18	DS1827W6A	6W 600LM 2700K 90 CRI CLEAR
	DS1830W6A	6W 600LM 3000K 90 CRI CLEAR
	DS1840W6A	6W 600LM 4000K 90 CRI CLEAR
	DS1850W6A	6W 600LM 5000K 90 CRI CLEAR

E12 T6	DT630W6A	6W 600LM 80CRI 3000K CLEAR
	DT640W6A	6W 600LM 80CRI 4000K CLEAR
	DT650W6A	6W 600LM 80CRI 5000K CLEAR

E26 A19	DA1930W8A	7.5W 800LM 3000K 80CRI CLEAR
	DA1940W8A	7.5W 800LM 4000K 80CRI CLEAR
	DA1950W8A	7.5W 800LM 5000K 80CRI CLEAR
	DA1930WP10A	10W 1000LM 3000K 90 CRI OPAL
	DA1930W10A	10W 1000LM 3000K 90 CRI CLEAR
	DA1940W10A	10W 1000LM 4000K 90 CRI CLEAR
	DA1950W10A	10W 1000LM 5000K 90 CRI CLEAR
	DA1930W12A	12W 1500LM 3000K 90 CRI CLEAR
	DA1930WP12A	12W 1500LM 3000K 90 CRI OPAL

E26 ST17	DST1730W8A	7.5W 750LM 3000K 80CRI CLEAR
	DST1740W8A	7.5W 750LM 4000K 80CRI CLEAR

E26 ST19	DST1930W8A	7.5W 750LM 3000K 80CRI CLEAR
	DST1940W8A	7.5W 750LM 4000K 80CRI CLEAR
	DST1950W8A	7.5W 750LM 5000K 80CRI CLEAR

E26 T10	DT1030SW4A	4W 400LM 3000K 80CRI CLEAR
	DT1040SW4A	4W 400LM 4000K 80CRI CLEAR

E26 T10	DT1030MW8A	6W 550LM 3000K 80CRI CLEAR
	DT1040MW8A	6W 550LM 4000K 80CRI CLEAR

E26 T10	DT1030LW15A	7W 700LM 3000K 80CRI CLEAR
	DT1040LW15A	7W 700LM 4000K 80CRI CLEAR

E26 G25	DG2530W10A	10W 1000LM 3000K 80CRI CLEAR
	DG2540W10A	10W 1000LM 4000K 80CRI CLEAR
	DG2530WP10A	10W 950LM 3000K 80CRI OPAL
	DG2540WP10A	10W 950LM 4000K 80CRI OPAL

E26 G40	DG4030W10A	10W 1000LM 3000K 80CRI CLEAR
	DG4030WP10A	10W 950LM 3000K 80CRI OPAL

## 5CCT BULBS

(2700K/3000K/3500K/4000K/5000K)

STOCK CODE DESCRIPTION

E26 A19	DA19CCTW8B	8W 1055LM 90 CRI 5CCT CLEAR
	DA19CCTWP8B	8W 1055LM 90 CRI 5CCT OPAL

E26 ST19	DST19CCTW8B	8W 1055LM 90 CRI 5CCT CLEAR
----------	-------------	-----------------------------

## TRILIGHT

(2700K/3000K/3500K/4000K/5000K)

E26 A19	DA19CCTWP8T	MAX 8W MAX 1000 LM 90 CRI 5CCT OPAL
---------	-------------	---

## 4-PACK IVORY BULBS

STOCK CODE DESCRIPTION

E26 ST19	DMPST1930W8	7.5W 750LM 3000K 80CRI CLEAR
	DMPST1940W8	7.5W 750LM 4000K 80CRI CLEAR



# TABLE OF CONTENTS

ADVANCED DIMMING ADJUSTMENTS.....	8
SPECIALTY BULBS.....	9

## E12

<b>C35</b> CLEAR CANDELABRA LED 40W EQUIVALENT.....	10
<b>C35</b> OPAL CANDELABRA LED 40W EQUIVALENT.....	11
<b>C35</b> CLEAR CANDELABRA LED 50W EQUIVALENT.....	12
<b>C35</b> CLEAR CANDELABRA CR 190 LED 60W EQUIVALENT.....	13
<b>C35</b> CLEAR CANDELABRA LED 75W EQUIVALENT.....	14
<b>C35</b> CLEAR CANDELABRA IVORY LED 60W EQUIVALENT.....	15
<b>C35</b> OPAL CANDELABRA LED 75W EQUIVALENT.....	16
<b>C35</b> “CUT CRYSTAL” CANDELABRA LED 40W EQUIVALENT.....	17
<b>G16</b> CLEAR LED 40W EQUIVALENT.....	18
<b>G16</b> OPAL LED 75W EQUIVALENT.....	19
<b>G16</b> CLEAR IVORY LED 60W EQUIVALENT.....	20
<b>G16</b> OPAL IVORY LED 40W EQUIVALENT.....	21
<b>ST12</b> “MINI” EDISON LED 40W EQUIVALENT.....	22
<b>S18</b> “SPEAR” LED 60W EQUIVALENT.....	24
<b>S18</b> “SPEAR” IVORY 90 CRI LED 60W EQUIVALENT.....	25
<b>T6</b> “LIPSTICK” 90 CRI LED 40W EQUIVALENT.....	26
<b>T6</b> “TORPEDO” 90 CRI LED 40W EQUIVALENT.....	27
<b>T6</b> CLEAR “TORPEDO” IVORY LED 60W EQUIVALENT.....	28
<b>T6</b> OPAL “TORPEDO” LED 60W EQUIVALENT.....	29
<b>T9</b> CLEAR “TORPEDO” 90 CRI LED 60W EQUIVALENT.....	30
<b>T20</b> “MARSHMALLOW” LED 40W EQUIVALENT.....	31
<b>A15</b> CLEAR LED 60W EQUIVALENT.....	32
<b>A19</b> OPAL TRILIGHT LOW / MEDIUM / 100W EQUIVALENT.....	33
<b>A19</b> COLOUR TEMPERATURE SELECTABLE 100W EQUIVALENT.....	34
<b>A19</b> OPAL COLOUR TEMPERATURE SELECTABLE 100W EQUIVALENT.....	35
<b>A19</b> CLEAR LED 75W EQUIVALENT.....	36
<b>A19</b> OPAL LED 75W EQUIVALENT.....	37
<b>A19</b> CLEAR IVORY LED 75W EQUIVALENT.....	38
<b>A19</b> OPAL IVORY 90 CRI LED 100W EQUIVALENT.....	39
<b>A19</b> CLEAR IVORY 90 CRI LED 100W EQUIVALENT.....	40
<b>A19</b> CLEAR IVORY 90 CRI LED 150W EQUIVALENT.....	41
<b>A19</b> OPAL IVORY 90 CRI LED 150W EQUIVALENT.....	42
<b>ST17</b> SMALL EDISON LED 40W EQUIVALENT.....	43
<b>ST17</b> EDISON IVORY LED 75W EQUIVALENT.....	44
<b>ST18</b> “VINTAGE” TUNGSTEN 60W INCANDESCENT.....	45
<b>ST19</b> COLOUR TEMPERATURE SELECTABLE 100W EQUIVALENT.....	46
<b>ST19</b> EDISON LED 60W EQUIVALENT.....	47
<b>ST19</b> EDISON IVORY LED 60W EQUIVALENT.....	48
<b>ST19</b> OPAL EDISON LED 60W EQUIVALENT.....	49
<b>ST25</b> OVERSIZE EDISON LED 100W EQUIVALENT.....	50
<b>T10</b> CLEAR 5IN LED 40W EQUIVALENT.....	51
<b>T10</b> CLEAR IVORY 5IN LED 40W EQUIVALENT.....	52
<b>T10</b> OPAL 5IN LED 35W EQUIVALENT.....	53
<b>T10</b> CLEAR 9IN 90 CRI LED 60W EQUIVALENT.....	54
<b>T10</b> CLEAR IVORY 9IN LED 60W EQUIVALENT.....	55
<b>T10</b> CLEAR 12IN LED 60W EQUIVALENT.....	56
<b>T10</b> CLEAR IVORY 12IN LED 60W EQUIVALENT.....	57
<b>T14</b> CLEAR 5.5IN LED 75W EQUIVALENT.....	58
<b>T14</b> OPAL 5.5IN LED 60W EQUIVALENT.....	59
<b>T14</b> CLEAR 8IN LED 100W EQUIVALENT.....	60
<b>T14</b> OPAL 8IN LED 100W EQUIVALENT.....	61
<b>G25</b> CLEAR IVORY LED 100W EQUIVALENT.....	62
<b>G25</b> OPAL IVORY LED 100W EQUIVALENT.....	63
<b>G25</b> CLEAR LED 75W EQUIVALENT.....	64
<b>G25</b> HALF PLATED LED 60W EQUIVALENT.....	65
<b>G40</b> CLEAR IVORY LED 100W EQUIVALENT.....	66
<b>G40</b> OPAL IVORY LED 100W EQUIVALENT.....	67
<b>A165</b> CLEAR “JUPITER” 90 CRI LED 100W EQUIVALENT.....	68
<b>A165</b> OPAL “JUPITER” 90 CRI LED 100W EQUIVALENT.....	69

## E26

## G9

<b>G9</b> CLEAR LONGLIFE LED 40W EQUIVALENT.....	70
<b>G9</b> FROSTED LONGLIFE LED 35W EQUIVALENT.....	71
<b>G9</b> CLEAR LED 50W EQUIVALENT.....	72
<b>G9</b> “CUT CRYSTAL” LED 50W EQUIVALENT.....	73

## COB

<b>MR16</b> COB 90 CRI LED 50W EQUIVALENT.....	74
<b>MR16</b> “UTILITY” MCOB 35W EQUIVALENT.....	75
<b>MR16</b> COB LED 50W EQUIVALENT.....	76
<b>MR16</b> “UTILITY” MCOB LED 35W EQUIVALENT.....	77
<b>MR16</b> COB 90 CRI LED 50W EQUIVALENT.....	78

## PACKS

<b>C35</b> 6-PACK CLEAR CANDELABRA LED 40W EQUIVALENT.....	79
<b>A19</b> 12-PACK CLEAR / OPAL LED 75W EQUIVALENT DIMMABLE.....	80
<b>A19</b> 12-PACK CLEAR / OPAL LED 75W EQUIVALENT NON-DIMMABLE.....	81
<b>ST19</b> 4-PACK CLEAR EDISON LED 60W EQUIVALENT.....	82
<b>ST19</b> 4-PACK CLEAR EDISON IVORY LED 60W EQUIVALENT.....	83

ACCESSORIES.....	85
------------------	----

## LED FLAT PANELS

AVRO.....	91
BANSHEE PRO 0-10V.....	93
ELSIE.....	95
HURRICANE.....	97
MISTRAL.....	99
POLARIS.....	101
TYPHOON.....	103
TRIM REFERENCE GUIDE.....	104



# STATE OF LIGHT FOR 2025

## **LED FILAMENT BULBS: THE NEXT GENERATION IS HERE**

LED filament bulbs have firmly established their place in the market. Their pricing is now competitive with incandescent and halogen options, but with a far longer lifespan—typically lasting 5 times longer, or over 3–5 years depending on usage. Remember when bulbs barely lasted a year?

Today's LED bulbs also deliver exceptional energy efficiency, producing over 120 lumens per watt—a massive leap from the sub-1 lumen/watt output over traditional incandescent bulbs.

### **So why the hesitation from some consumers?**

Despite their advantages, many customers still reminisce about the “good old days” of incandescent lighting. One major reason: aesthetics. When off, the visible yellow filaments in LED bulbs can distract from the overall look of a fixture. It's a small visual detail, but one that impacts buying decisions.

## **ENTER THE IVORY FILAMENT BULB**

DVI has addressed this with the introduction of the Ivory Filament Bulb—featuring a translucent ivory silicone sheath that conceals the yellow phosphor when the bulb is off, yet disappears completely when lit. The result? Clean, elegant bulbs that enhance, not distract from, your fixture designs. This innovation removes one of the last real objections to LED filament adoption.

## **THERE IS A GOOD WAY AND A BAD WAY TO CREATE AN IVORY FILAMENT BULB**

Many low-cost manufacturers cut corners by painting filaments—a quick fix that flakes over time due to heat and age. DVI refuses to compromise on quality and uses only durable silicone-coated phosphors that retain their look and function. Be aware of this when looking at competitor offerings, and ask the question, or better yet, crack a bulb open and feel the filaments. Painted vs. silicone is easily detected. Don't be fooled.

## **LAUNCHING THIS LABOUR DAY**


Starting Labour Day, DVI will offer a full range of ivory filament bulbs across most of our product line. While yellow filaments will remain in our baseline, low-lumen offerings, the majority of our products will transition to the new ivory standard.

At the same time, we're rolling out our 7th generation of wattage/lumen packages. Thanks to efficiencies with our overseas partners, we can now offer 600–800 lumen bulbs at lower prices than our 400-lumen models just two years ago. That means better performance and better value for your customers—more lumens for the buck.

## **DISC LIGHTS: CONTINUED REFINEMENT AND EXPANSION OF OUR PRODUCT OFFERINGS**


DVI continues to refine our selection of disc lights. We are discontinuing our 1CCT “Firefly” family due to pricing negotiations that have allowed us to offer our similar pricing on our 5CCT “Hurricane” discs. Indistinguishable from each other and featuring 5CCT selectable colour temperature settings, “Hurricane” should immediately fill the void left by “Firefly” leaving the line.

**Robert Francis Borg**  
CEO & Creative Director



Did you know that our new part numbers also provide technical information on each bulb?

DVI BRAND IDENTIFIER	BULB SHAPE	BULB SIZE	COLOUR TEMPERATURE	FILAMENT/ GLASS TYPE	WATTAGE	BULB VERSION
<b>D</b>	<b>G</b>	<b>16</b>	<b>40</b>	<b>WP</b>	<b>4</b>	<b>A</b>
	ST	19	22 2200K	C CLEAR GLASS	4	B
	T	6	27 2700K	W IVORY FILAMENT	↓	C
	C	35	30 3000K	P OPAL GLASS		12
	A	19	35 3500K	WP IVORY FILAMENT OPAL GLASS		
	E	12	40 4000K			
	GU	10	50 5000K			

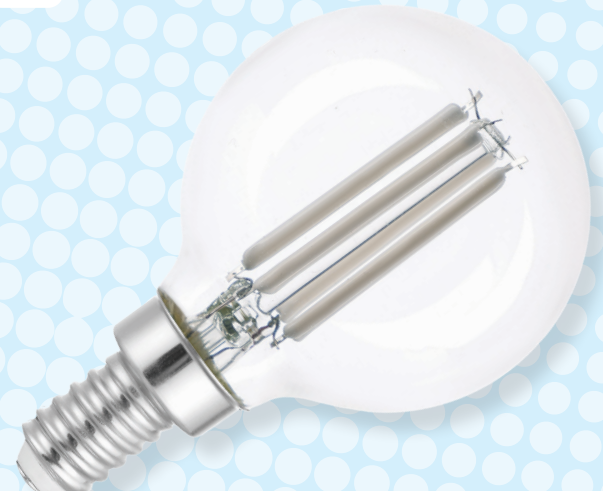

# DIRECTORY

## A TYPES



**E26 A15**  
Clear  
LED 60W  
Equivalent  
Page 32



**E26 A19**  
Opal Trilight  
Low / Medium /  
100W Equivalent  
Page 33



**E26 A19**  
Clear Colour  
Temperature  
Selectable 100W  
Equivalent  
Page 34



**E26 A19**  
Opal Colour  
Temperature  
Selectable 100W  
Equivalent  
Page 35



**E26 A19**  
Clear  
LED 75W  
Equivalent  
Page 36



**E26 A19**  
Opal  
LED 75W  
Equivalent  
Page 37



**E26 A19**  
Clear Ivory  
LED 75W  
Equivalent  
Page 38



**E26 A19**  
Opal Ivory  
90 CRI LED 100W  
Equivalent  
Page 39



**E26 A19**  
Clear Ivory  
90 CRI LED  
100W Equivalent  
Page 40



**E26 A19**  
Opal Ivory  
90 CRI LED 150W  
Equivalent  
Page 41



**E26 A19**  
Clear Ivory  
90 CRI LED 150W  
Equivalent  
Page 41



**E26 A165**  
Clear "Jupiter"  
90 CRI LED  
100W Equivalent  
Page 68



**E26 A165**  
Opal "Jupiter"  
90 CRI LED 100W  
Equivalent  
Page 69

## C TYPES



**E12 C35**  
Clear Candelabra  
LED 40W  
Equivalent  
Page 10



**E12 C35**  
Opal Candelabra  
LED 40W  
Equivalent  
Page 11



**E12 C35**  
Clear Candelabra  
LED 50W  
Equivalent  
Page 12



**E12 C35**  
Clear Candelabra  
90 CRI LED 60W  
Equivalent  
Page 13



**E12 C35**  
Clear Candelabra  
LED 75W  
Equivalent  
Page 14



**E12 C35**  
Clear Candelabra  
Ivory LED 60W  
Equivalent  
Page 15



**E12 C35**  
Opal Candelabra  
LED 75W  
Equivalent  
Page 16



**E12 C35**  
"Cut Crystal"  
Candelabra LED  
40W Equivalent  
Page 17

## G TYPES



**E12 G16**  
Clear  
LED 40W  
Equivalent  
Page 18



**E12 G16**  
Opal  
LED 75W  
Equivalent  
Page 19



**E12 G16**  
Clear Ivory  
LED 60W  
Equivalent  
Page 20



**E12 G16**  
Opal Ivory  
LED 40W  
Equivalent  
Page 21



**E26 G25**  
Clear Ivory  
LED 100W  
Equivalent  
Page 62



**E26 G25**  
Opal Ivory  
LED 100W  
Equivalent  
Page 63



**E26 G25**  
Clear  
LED 75W  
Equivalent  
Page 64



**E26 G25**  
Half Plated  
LED 60W  
Equivalent  
Page 65



**E26 G40**  
Clear Ivory  
LED 100W  
Equivalent  
Page 66



**E26 G40**  
Opal Ivory  
LED 100W  
Equivalent  
Page 67

## G9 TYPES



**G9**  
Clear Longlife LED  
40W Equivalent  
Page 70



**G9**  
Frosted Longlife  
LED 35W Equivalent  
Page 71



**G9**  
Clear LED 50W  
Equivalent  
Page 72



**G9**  
"Cut Crystal"  
LED 50W Equivalent  
Page 73



# LED FLAT PANELS

**AVRO**  
LED Flat Panel  
Page 91

**BANSHEE  
PRO 0-10V**  
LED Flat Panel  
Page 93

**ELSIE**  
LED Flat Panel  
Page 95

**HURRICANE**  
LED Flat Panel  
Page 97

**MISTRAL**  
LED Flat Panel  
Page 99

**POLARIS**  
LED Flat Panel  
Page 101

**TYPHOON**  
LED Flat Panel  
Page 103



# MR TYPES

**E26 MR16**  
COB 90 CRI LED  
50W Equivalent  
Page 74

**GU5.3 MR16**  
"Utility" MCOB  
35W Equivalent  
Page 75

**GU5.3 MR16**  
COB LED 50W  
Equivalent  
Page 76

**GU10 MR16**  
"Utility"  
MCOB LED 35W  
Equivalent  
Page 77

**GU10 MR16**  
COB 90 CRI LED  
50W Equivalent  
Page 78



# PACKS

**E12 C35**  
6-pack Clear  
Candelabra LED  
40W Equivalent  
Page 79

**E26 A19**  
12-pack Clear / Opal  
LED 75W Equivalent  
Dimmable  
Page 80

**E26 A19**  
12-pack Clear / Opal  
LED 75W Equivalent  
NON-Dimmable  
Page 81

**E26 ST19**  
4-pack Clear  
Edison LED 60W  
Equivalent  
Page 82

**E26 ST19**  
4-pack Clear  
Edison Ivory LED  
60W Equivalent  
Page 83



# S/ ST TYPES

**E12 ST12**  
"Mini" Edison  
LED 40W  
Equivalent  
Page 22

**E12 S18**  
"Spear"  
LED 60W  
Equivalent  
Page 24

**E12 S18**  
"Spear" Ivory  
LED 60W  
Equivalent  
Page 25

**E26 ST17**  
Small Edison  
LED 40W  
Equivalent  
Page 42

**E26 ST17**  
Edison Ivory  
LED 75W  
Equivalent  
Page 43

**E26 ST18**  
"Vintage"  
Tungsten 60W  
Incandescent  
Page 44

**E26 ST18**  
Colour  
Temperature  
Selectable  
100W Equivalent  
Page 45

**E26 ST19**  
Edison  
LED 60W  
Equivalent  
Page 46

**E26 ST19**  
Edison Ivory  
LED 60W  
Equivalent  
Page 47

**E26 ST19**  
Opal Edison  
LED 60W  
Equivalent  
Page 48

**E26 ST25**  
Oversize Edison  
LED 100W  
Equivalent  
Page 49



# T TYPES

**E12 T6**  
"Lipstick"  
90 CRI LED 40W  
Equivalent  
Page 26

**E12 T6**  
"Torpedo"  
90 CRI LED  
40W Equivalent  
Page 27

**E12 T6**  
Clear "Torpedo"  
Ivory LED 60W  
Equivalent  
Page 28

**E12 T6**  
Opal "Torpedo"  
LED 60W  
Equivalent  
Page 29

**E12 T9**  
Clear "Torpedo"  
90 CRI LED 60W  
Equivalent  
Page 30

**E12 T20**  
"Marshmallow"  
LED 40W  
Equivalent  
Page 31

**E26 T10**  
Clear 5in LED  
40W Equivalent  
Page 50

**E26 T10**  
Clear Ivory  
5in LED 40W  
Equivalent  
Page 51



**E26 T10**  
Opal 5in  
LED 35W  
Equivalent  
Page 52

**E26 T10**  
Clear 9in  
90 CRI LED 60W  
Equivalent  
Page 54

**E26 T10**  
Clear Ivory 9in  
LED 60W  
Equivalent  
Page 55

**E26 T10**  
Clear 12in  
LED 60W  
Equivalent  
Page 56

**E26 T10**  
Clear Ivory 12in  
LED 60W  
Equivalent  
Page 57

**E26 T14**  
Clear 5.5in  
LED 75W  
Equivalent  
Page 58

**E26 T14**  
Opal 5.5in  
LED 60W  
Equivalent  
Page 59

**E26 T14**  
Clear 8in  
LED 100W  
Equivalent  
Page 60

**E26 T14**  
Opal 8in  
LED 100W  
Equivalent  
Page 61

# ADVANCED DIMMING ADJUSTMENTS\*^

## LUTRON MAESTRO MACL-153MH

**Entering programming mode:** Pull bottom service switch out, push and hold top portion of rocker switch then simultaneously push service switch back in while continuing to hold for 5 additional seconds at which point an indicator light will slowly blink.

**To enter high/low end trim adjustment mode:** Press the raise or lower buttons on the right side of the dimmer until the bank of LEDs on the left-hand side illuminate at the top position (high end trim) or second from the top (low end trim), then tap and release top portion of rocker switch – an indicator light will blink rapidly.

**To adjust high/low end trim:** Press the raise or lower buttons on the right side of the dimmer until the bank of LEDs on the left-hand side corresponds with the desired high/low end trim as shown in your luminaire, then then tap and release top portion of rocker switch to exit programming mode.

## LUTRON DIVA C.L DVWCL-153PH

**Entering programming mode:** Turn off dimmer and remove wall plate to expose adjustment dial on lower left corner and take note of the colours (in order: White, White, White, Magenta, Orange, Blue, Green, Black).

**To enter high/low end trim adjustment mode:** Set slider on right side of dimmer to bottom, then rotate dial clockwise (to reduce luminaire output), or counter clockwise (to increase luminaire output) until bulbs no longer flicker and are dimly illuminated when slider is at bottom, then reinstall wall plate.

## LUTRON CASETA WIRELESS PD-6WCL

**Entering programming mode:** Turn dimmer off, then press and hold the 'On'/top button along with the 'Brighter'/second button from top for 6 seconds – an illuminator light will begin to flash.

**To enter low end trim adjustment mode:** Turn dimmer off, then press and hold the 'On'/top button along with the 'Darker'/third button from top for 6 seconds – an illuminator light will begin to flash.

**To adjust high/low end trim:** Tap the 'Darker' and 'Brighter' buttons until bulbs no longer flicker and are dimly illuminated, then hold the 'Off'/bottom button until the illuminator light no longer flashes – tap off to cycle the dimmer and verify settings.

## LEVITON DECORA SURESLIDE 6674-POW

**Entering programming mode:** Turn off dimmer and remove wall plate to expose switch at top with 'A' and 'B' markings.

**To enter high end trim adjustment mode:** Set switch to position 'A' and move main slider all the way to the top, then turn dimmer on and set switch to position 'B'.

**To enter low end trim adjustment mode:** Set switch to position 'A' and move main slider all the way to the bottom, then turn dimmer on and set switch to position 'B'.

**To adjust high/low end trim:** Move main slider to desired light level on luminaire, then set switch to 'A' the luminaire will momentarily flash confirming the setting – turn the dimmer off at this point.

## LUTRON C.L SKYLARK COUNTOUR CTCL-153P

**Entering programming mode:** Turn off dimmer and remove wall plate to expose lever switch at side with '+' and '-' markings.

**To enter low end trim adjustment mode:** Turn dimmer on and move main slider all the way to the bottom.

**To adjust low end trim:** Move '+/-' lever to desired light level on luminaire, then cycle dimmer off/on to verify proper settings and reinstall wall plate.

**Use 'My Leviton' app to adjust.**

## LEVITON DECORA ROCKER SLIDE DSL06-1LZ

**Entering programming mode:** Turn off dimmer and remove wall plate plus colour kit via the side tabs near the bottom of the switch panel to expose the bare actuators.

**To enter high end trim adjustment mode:** Move main slider bar all the way to the top, ensure mode selector with 'A/B' markings is set on 'A' then turn dimmer on by holding the 'On/Off' paddle while moving mode selector to position 'B'.

**To enter low end trim adjustment mode:** Move main slider bar all the way to the bottom, ensure mode selector with 'A/B' markings is set on 'A' then turn dimmer on by holding the 'On/Off' paddle while moving mode selector to position 'B'.

**To adjust high/low end trim:** Move main slider bar to desired light level on luminaire, then move mode selector to 'A' – the luminaire will momentarily flash confirming the setting at this point turn the dimmer off and replace colour kit plus wall plate.

## LUTRON MAESTRO MA-PRO-WH

**Entering programming mode:** Pull bottom service switch out, push and hold top portion of rocker switch then simultaneously push service switch back in while continuing to hold for 5 additional seconds at which point an indicator light will slowly blink.

**To enter high/low end trim adjustment mode:** Press the raise or lower buttons on the right side of the dimmer until the bank of LEDs on the left-hand side illuminate at the top position (high end trim) or second from the top (low end trim), then tap and release top portion of rocker switch – an indicator light will blink rapidly.

**To adjust high/low end trim:** Press the raise or lower buttons on the right side of the dimmer until the bank of LEDs on the left-hand side corresponds with the desired high/low end trim as shown in your luminaire, then then tap and release top portion of rocker switch to exit programming mode.


**To enter high/low end trim adjustment mode:** Press and hold the raise button on the right side of the dimmer for 5 seconds until the bank of LEDs on the left-hand side illuminate at the top position (forward phase), middle (auto phase select), or bottom (reverse phase).

**To adjust forward/reverse phase:** Press the raise or lower buttons on the right side of the dimmer until the bank of LEDs on the left-hand side corresponds with the desired phase, then then tap and release top portion of rocker switch to exit programming mode.

\*For full unabridged instructions and additional information, please visit websites of each vendor for the associated dimmer model you wish to utilize.

^Text reproduced from Lutron and Leviton documentation - DVI does not warrant or guarantee performance and/or results.

# SPECIALITY BULBS

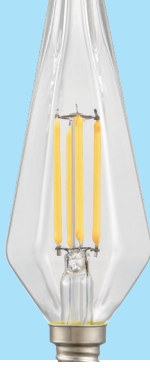

## E12/C35 "CUT CRYSTAL" CANDELABRA LED 40W EQUIVALENT



Illuminate your space with our C35/B10 Clear LED light bulb, designed with a stylish C35/B10 lamp shape and a convenient E12 base. Enjoy energy-efficient and long-lasting lighting while adding a touch of elegance to your chandeliers, sconces, or decorative fixtures. Create a warm and inviting ambiance with this reliable and eco-friendly lighting solution.

**PAGE 17**

## E26/A165 CLEAR "JUPITER" 90 CRI LED 100W EQUIVALENT



Illuminate your space with our A165 Clear LED light bulb, designed with a stylish A165 lamp shape and a convenient E26 base. Enjoy energy-efficient and long-lasting lighting while adding a touch of elegance to your chandeliers, sconces, or decorative fixtures. Create a warm and inviting ambiance with this reliable and eco-friendly lighting solution.

**PAGE 68**

## E12/S18 "SPEAR" LED 40W EQUIVALENT



Illuminate your space with our "Spear" LED light bulb, designed with a stylish S18 lamp shape and a convenient E12 base.

**PAGE 24**

## E26/A165 OPAL "JUPITER" 90 CRI LED 100W EQUIVALENT



Illuminate your space with our A165 Opal LED light bulb, designed with a stylish A165 lamp shape and a convenient E26 base. Enjoy energy-efficient and long-lasting lighting while adding a touch of elegance to your chandeliers, sconces, or decorative fixtures. Create a warm and inviting ambiance with this reliable and eco-friendly lighting solution.

**PAGE 69**

## E12/T6 "LIPSTICK" LED 40W EQUIVALENT



Illuminate your space with our "Lipstick" LED light bulb, designed with a stylish T6 lamp shape and a convenient E12 base.

**PAGE 26**

## G9 "CUT CRYSTAL" LED 40W EQUIVALENT



Illuminate your space with our "Cut Crystal" G9 LED light bulb, designed with a stylish G9 lamp shape and a convenient G9 base. Enjoy energy-efficient and long-lasting lighting while adding a touch of elegance to your chandeliers, sconces, or decorative fixtures. Create a warm and inviting ambiance with this reliable and eco-friendly lighting solution.

**PAGE 73**

## E12/T20 "MARSHMALLOW" LED 40W EQUIVALENT



Say it once and you'll immediately conjure up thoughts of campfires, candy, and camaraderie. The unique design and color temperature options make this the ideal bulb for light fixtures with exposed lightbulbs. While it is rated for enclosed light fixtures, we don't know why you would want to cover this adorable little guy up. It's so cute we can't stand it!

**PAGE 31**

E12

C35

# CLEAR CANDELABRA LED 40W EQUIVALENT



H 3<sup>3</sup>/<sub>4</sub>"

Ø 1<sup>3</sup>/<sub>8</sub>"

## PACKAGING







NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

## SPECIFICATIONS

WATTS	4.4
DELIVERED LUMENS	400-500
LAMP SHAPE	C35
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 <sup>3</sup> / <sub>4</sub> "
MAXIMUM DIAMETER	1 <sup>3</sup> / <sub>8</sub> "
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	27 YEARS
ENERGY COST @10.65¢/kWh†	\$0.51 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 2700 KELVIN · LUMENS 400	<b>D31128A</b>		
 3000 KELVIN · LUMENS 425	<b>D31138A</b>		
 4000 KELVIN · LUMENS 450	<b>D31148A</b>		
 5000 KELVIN · LUMENS 500	<b>D31158A</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LUTRON SUNNATA STCL-153PH-WH-C		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		^	MIN	✓	✓	✓		^	MIN	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	MAX
LEVITON DECORA SURESLIDE®		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	MAX		•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓		✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LEVITON DECORA SMART™			MIN	✓	✓	✓		✓	MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓

**E12**

**C35**

**OPAL CANDELABRA LED 40W EQUIVALENT**



H 3<sup>3</sup>/<sub>4</sub>"

Ø 1<sup>3</sup>/<sub>8</sub>"

**PACKAGING**





NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	4
DELIVERED LUMENS	350
LAMP SHAPE	C35
GLASS SHADE	OPAL <sup>†</sup>
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 <sup>3</sup> / <sub>4</sub> "
MAXIMUM DIAMETER	1 <sup>3</sup> / <sub>8</sub> "
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	27 YEARS
ENERGY COST @10.65¢/kWh†	\$0.47 / YEAR
WARRANTY	3 YRS / 12,000 HRS

<sup>†</sup> Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 3000 KELVIN · LUMENS 350	<b>D33138A</b>		
 4000 KELVIN · LUMENS 350	<b>D33148A</b>		

<sup>†</sup>Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LUTRON SUNNATA STCL-153PH-WH-C		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	•	✓	✓	✓


**E12****C35****CLEAR CANDELABRA LED 50W EQUIVALENT**H 3<sup>3</sup>/<sub>4</sub>"Ø 1<sup>3</sup>/<sub>8</sub>"**PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	5
DELIVERED LUMENS	550
LAMP SHAPE	C35
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 <sup>3</sup> / <sub>4</sub> "
MAXIMUM DIAMETER	1 <sup>3</sup> / <sub>8</sub> "
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	27 YEARS
ENERGY COST @10.65¢/kWh†	\$0.58 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 2700 KELVIN · LUMENS 550	<b>DVLC35CC27C</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	^	^	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	X	^	✓	✓	✓	✓	X	^	✓	✓	✓	✓	X
LEVITON DECORA SURESLIDE®	^	•	✓	✓	✓	✓	^	^	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	•	•	✓	✓	✓	✓	^	^	✓	✓	✓	✓	^	^	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E12

C35

# CLEAR CANDELABRA 90 CRI LED 60W EQUIVALENT



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

SPECIFICATIONS	
WATTS	6
DELIVERED LUMENS	600
LAMP SHAPE	C35
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 <sup>3</sup> / <sub>4</sub> "
MAXIMUM DIAMETER	1 <sup>3</sup> / <sub>8</sub> "
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	27 YEARS
ENERGY COST @10.65¢/kWh†	\$0.70 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
2700 KELVIN · LUMENS 600	<b>D33129A</b>		
3000 KELVIN · LUMENS 600	<b>D33139A</b>		
4000 KELVIN · LUMENS 600	<b>D33149A</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	^	^	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	X	^	✓	✓	✓	✓	X	^	✓	✓	✓	✓	X
LEVITON DECORA SURESLIDE®	^	•	✓	✓	✓	✓	^	^	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	•	•	✓	✓	✓	✓	^	^	✓	✓	✓	✓	^	^	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E12

C35

# CLEAR CANDELABRA LED 75W EQUIVALENT



H 3 3/4"

Ø 1 3/8"

## PACKAGING





NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

## SPECIFICATIONS

WATTS	6
DELIVERED LUMENS	850
LAMP SHAPE	C35
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 3/4"
MAXIMUM DIAMETER	1 3/8"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	27 YEARS
ENERGY COST @10.65¢/kWh†	\$0.70 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 3000 KELVIN · LUMENS 850	<b>D32238A</b>		
 4000 KELVIN · LUMENS 850	<b>D32248A</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C	^	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON MAESTRO MACL-153MH	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH			MIN	✓	✓	✓			MIN	✓	✓	✓			MIN	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	•	✓	✓	✓	^
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E12

C35

# CLEAR CANDELABRA IVORY LED 60W EQUIVALENT



H 3<sup>3</sup>/<sub>4</sub>"

Ø 1<sup>3</sup>/<sub>8</sub>"



## PACKAGING



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

## SPECIFICATIONS

WATTS	6
DELIVERED LUMENS	600
LAMP SHAPE	C35
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 <sup>3</sup> / <sub>4</sub> "
MAXIMUM DIAMETER	1 <sup>3</sup> / <sub>8</sub> "
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.58 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 3000 KELVIN · LUMENS 600	<b>DC3530W6A</b>		
● 3500 KELVIN · LUMENS 600	<b>DC3535W6A</b>		
● 4000 KELVIN · LUMENS 600	<b>DC3540W6A</b>		
● 5000 KELVIN · LUMENS 600	<b>DC3550W6A</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E12

C35

# OPAL CANDELABRA LED 75W EQUIVALENT



Ø 1 3/8"

H 3 3/4"

## PACKAGING





NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

## SPECIFICATIONS

WATTS	6
DELIVERED LUMENS	800
LAMP SHAPE	C35
GLASS SHADE	OPAL*
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 3/4"
MAXIMUM DIAMETER	1 3/8"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	27 YEARS
ENERGY COST @10.65¢/kWh†	\$0.70 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 3000 KELVIN · LUMENS 800	<b>D33238A</b>		
 4000 KELVIN · LUMENS 800	<b>D33248A</b>		

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C	^	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON MAESTRO MACL-153MH	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH			MIN	✓	✓	✓			MIN	✓	✓	✓			MIN	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	•	✓	✓	✓	^
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E12

C35


# "CUT CRYSTAL" CANDELABRA LED 40W EQUIVALENT



H 3<sup>3</sup>/<sub>4</sub>"

Ø 1<sup>3</sup>/<sub>8</sub>"

## PACKAGING

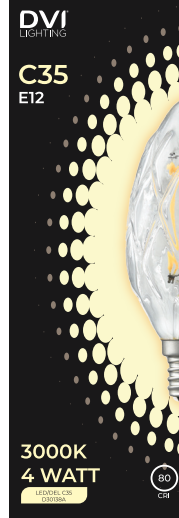

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

## SPECIFICATIONS

WATTS	4
DELIVERED LUMENS	400
LAMP SHAPE	C35
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 <sup>3</sup> / <sub>4</sub> "
MAXIMUM DIAMETER	1 <sup>3</sup> / <sub>8</sub> "
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.47 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 3000 KELVIN · LUMENS 400	<b>D30138A</b>	JANUARY 2026	
● 4000 KELVIN · LUMENS 400	<b>D30148A</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	•	✓	✓	•	✓	✓	

**E12**

**G16**

**CLEAR LED 40W EQUIVALENT**



H 3 1/8"

Ø 2"

**PACKAGING**



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	4
DELIVERED LUMENS	400
LAMP SHAPE	G16
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 1/8"
MAXIMUM DIAMETER	2"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	27 YEARS
ENERGY COST @10.65¢/kWh†	\$0.47 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 2200 KELVIN · LUMENS 400	<b>D41118A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	•	✓	✓	✓	•	✓	✓

E12

G16

# OPAL LED 75W EQUIVALENT



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

SPECIFICATIONS	
WATTS	6
DELIVERED LUMENS	750
LAMP SHAPE	G16
GLASS SHADE	OPAL <sup>†</sup>
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 3/4"
MAXIMUM DIAMETER	2"
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	27 YEARS
ENERGY COST @10.65¢/kWh†	\$0.70 / YEAR
WARRANTY	3 YRS / 12,000 HRS

<sup>†</sup> Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
3000 KELVIN · LUMENS 750	<b>D40238A</b>		
4000 KELVIN · LUMENS 750	<b>D40248A</b>		

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C	^	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON MAESTRO MACL-153MH	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH			MIN	✓	✓	✓			MIN	✓	✓	✓			MIN	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓		^	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	^	•	•	✓	✓	✓	^
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E12

G16

# CLEAR IVORY LED 60W EQUIVALENT



H 3¼"

Ø 2"

## PACKAGING



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

## SPECIFICATIONS

WATTS	6
DELIVERED LUMENS	600
LAMP SHAPE	G16
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3¼"
MAXIMUM DIAMETER	2"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.70 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 3000 KELVIN · LUMENS 600	<b>DG1630W6A</b>		
● 4000 KELVIN · LUMENS 600	<b>DG1640W6A</b>		
● 5000 KELVIN · LUMENS 600	<b>DG1650W6A</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E12

G16

# OPAL IVORY LED 40W EQUIVALENT





NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

SPECIFICATIONS	
WATTS	4
DELIVERED LUMENS	375
LAMP SHAPE	G16
GLASS SHADE	OPAL <sup>†</sup>
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 3/8"
MAXIMUM DIAMETER	2"
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.47 / YEAR
WARRANTY	3 YRS / 20,000 HRS

<sup>†</sup> Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 3000 KELVIN · LUMENS 375	<b>DG1630WP4A</b>		
 4000 KELVIN · LUMENS 375	<b>DG1640WP4A</b>		

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	•	✓	✓

E12

ST12


# "MINI" EDISON LED 40W EQUIVALENT



H 4"

Ø 1 3/4"

## PACKAGING

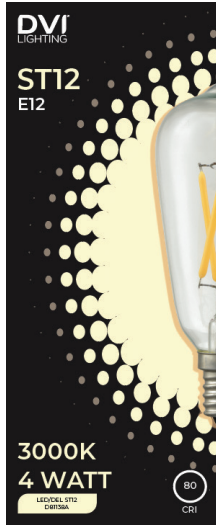



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

## SPECIFICATIONS

WATTS	4
DELIVERED LUMENS	350-400
LAMP SHAPE	ST12
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	4"
MAXIMUM DIAMETER	1 3/4"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.47 / YEAR
WARRANTY	3 YRS / 20,000 HRS


† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 2200 KELVIN · LUMENS 350	<b>D81118A</b>		
 3000 KELVIN · LUMENS 400	<b>D81138A</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LUTRON SUNNATA STCL-153PH-WH-C		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓




**Did you know we have an online database where you can find updated SKUs and their corresponding old codes?**



[dvcana.com/bulb-status-index/](http://dvcana.com/bulb-status-index/)

**SCAN TO CHECK OUR ONLINE BULB STATUS INDEX**

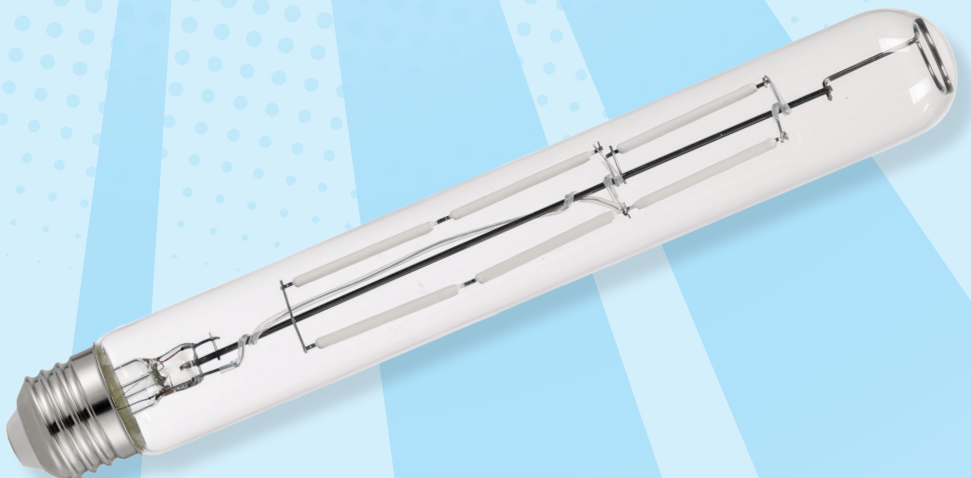

**E12**

**S18**


**"SPEAR" LED 60W EQUIVALENT**



H 4"

Ø 1 3/4"

**PACKAGING**



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	4
DELIVERED LUMENS	375-450
LAMP SHAPE	S18
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	4"
MAXIMUM DIAMETER	1 3/4"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.47 / YEAR
WARRANTY	3 YRS / 20,000 HRS


† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 2700 KELVIN · LUMENS 375	<b>DVLS18CC27A</b>		
● 3000 KELVIN · LUMENS 400	<b>D80138A</b>		
● 4000 KELVIN · LUMENS 425	<b>DVLS18CC40A</b>		
● 5000 KELVIN · LUMENS 450	<b>DVLS18CC50A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

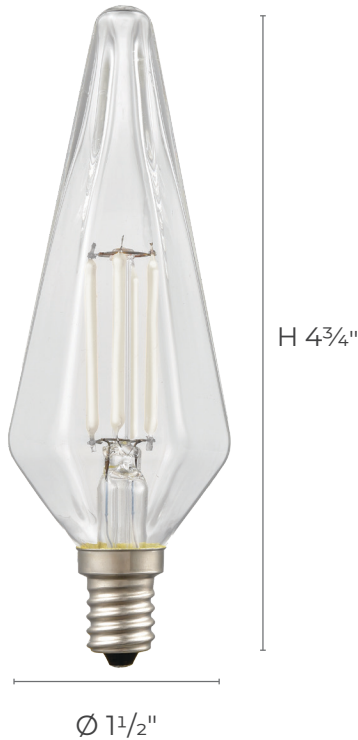**E12****S18****“SPEAR” IVORY 90 CRI LED 60W EQUIVALENT**

Ø 1 1/2"

NOTE: image as reference only, real product may vary

**PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	6
DELIVERED LUMENS	600
LAMP SHAPE	S18
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	4 3/4"
MAXIMUM DIAMETER	1 1/2"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	14 YEARS
ENERGY COST @10.65¢/kWh†	\$0.70 / YEAR
WARRANTY	2 YRS / 12,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 2700 KELVIN · LUMENS 600	<b>DS1827W6A</b>		
● 3000 KELVIN · LUMENS 600	<b>DS1830W6A</b>		
● 4000 KELVIN · LUMENS 600	<b>DS1840W6A</b>		
● 5000 KELVIN · LUMENS 600	<b>DS1850W6A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

LEGRAND ADORNE SOFTAP ADTP703U

LUTRON MAESTRO MACL-153MH

LUTRON DIVA® / DIVA® C.L DVWCL-153PH

LEVITON DECORA SURESLIDE®

LUTRON C.L SKYLARK CONTOUR CTL -153P

LUTRON CASETA® WIRELESS

LEVITON DECORA ROCKER SLIDE

LEVITON DECORA SMART™

LUTRON MAESTRO PRO MA-PRO-WH

**2 BULBS****5 BULBS****30 BULBS**

MIN 20 40 60 80 MAX MIN 20 40 60 80 MAX MIN 20 40 60 80 MAX



dvcana.com/product/ds1830w6a/


**E12**

**T6**

# "LIPSTICK" 90 CRI LED 40W EQUIVALENT



## PACKAGING




NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

## SPECIFICATIONS

WATTS	4
DELIVERED LUMENS	400
LAMP SHAPE	T6
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 3/4"
MAXIMUM DIAMETER	3/4"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.47 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 2700 KELVIN · LUMENS 400	<b>D83129A</b>		
 3000 KELVIN · LUMENS 400	<b>D83139A</b>		
 4000 KELVIN · LUMENS 400	<b>D83149A</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓

**E12**

**T6**

**“TORPEDO” 90 CRI LED 40W EQUIVALENT**



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

SPECIFICATIONS	
WATTS	4
DELIVERED LUMENS	400-425
LAMP SHAPE	T6
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 1/4"
MAXIMUM DIAMETER	3/4"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.47 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 2700 KELVIN · LUMENS 400	<b>D75129A</b>		
● 3000 KELVIN · LUMENS 400	<b>D75139A</b>		
● 4000 KELVIN · LUMENS 425	<b>D75149A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	•	✓	✓	✓

E12

T6

# CLEAR "TORPEDO" IVORY LED 60W EQUIVALENT



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

SPECIFICATIONS	
WATTS	6
DELIVERED LUMENS	600
LAMP SHAPE	T6
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 1/4"
MAXIMUM DIAMETER	3/4"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.70 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
3000 KELVIN · LUMENS 600	<b>DT630W6A</b>		
4000 KELVIN · LUMENS 600	<b>DT640W6A</b>		
5000 KELVIN · LUMENS 600	<b>DT650W6A</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

**E12**

**T6**



**OPAL "TORPEDO" LED 60W EQUIVALENT**



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

SPECIFICATIONS	
WATTS	6
DELIVERED LUMENS	600
LAMP SHAPE	T6
GLASS SHADE	OPAL*
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 1/2"
MAXIMUM DIAMETER	3/4"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.70 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 3000 KELVIN · LUMENS 600	<b>D85139A</b>		
 4000 KELVIN · LUMENS 600	<b>D85149A</b>		

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E12

T9

# CLEAR "TORPEDO" 90 CRI LED 60W EQUIVALENT



H 3<sup>3</sup>/<sub>4</sub>"

Ø 1"



## PACKAGING






NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

## SPECIFICATIONS

WATTS	5
DELIVERED LUMENS	550-575
LAMP SHAPE	T9
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 <sup>3</sup> / <sub>4</sub> "
MAXIMUM DIAMETER	1"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	YES
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.58 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 2700 KELVIN · LUMENS 550	<b>D76129A</b>		
 3000 KELVIN · LUMENS 550	<b>D76139A</b>		
 4000 KELVIN · LUMENS 575	<b>D76149A</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			MIN	✓	✓	✓			MIN	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	•	•	✓	✓	✓	✓	•	•	✓	✓	✓	✓	•

E12

T20

# "MARSHMALLOW" LED 40W EQUIVALENT



## PACKAGING





NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

## SPECIFICATIONS

WATTS	4
DELIVERED LUMENS	400
LAMP SHAPE	T20
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 1/4"
MAXIMUM DIAMETER	2"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.47 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 3000 KELVIN · LUMENS 400	<b>D82138A</b>		
 4000 KELVIN · LUMENS 400	<b>DVLT20CC40A</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓

E26

A15

# CLEAR LED 60W EQUIVALENT



H 3 1/2"

Ø 2"

## PACKAGING



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

## SPECIFICATIONS

WATTS	6
DELIVERED LUMENS	575-625
LAMP SHAPE	A15
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	3 1/2"
MAXIMUM DIAMETER	2"
CRI	80+
BEAM ANGLE	360°
JAB8 CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.70 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 2700 KELVIN · LUMENS 575	DVA15MC27A		
● 3000 KELVIN · LUMENS 600	DVA15MC30A	DECEMBER 2025	DAI530C6A
● 4000 KELVIN · LUMENS 615	DVA15MC40A		
● 5000 KELVIN · LUMENS 625	DVA15MC50A		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	^	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	^	✓	•	✓	✓	✓	✓	✓	•	^	^	✓	✓	✓	✓	^
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	^	^	✓	^	✓	X	✓	^	✓	✓	✓	X	^	✓	✓	^	^	^	X
LEVITON DECORA SURESLIDE®	^	✓	✓	✓	✓	✓	^	^	^	✓	✓	✓	^	^	^	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	^	^	✓	✓	✓	✓	^	^	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	^	^	✓	✓	✓	^	^	^	^	✓	✓	✓	^	^	^	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	^	✓	✓	✓	✓	^	^	✓	✓	✓	✓	✓	^	^	^	^	✓	✓	✓
LEVITON DECORA SMART™	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓

E26

A19

# OPAL TRILIGHT LOW / MEDIUM / 100W EQUIVALENT




H 4¼"

Ø 2½"

NOTE: image as reference only, real product may vary

### 5CCT Model



### 5CCT Switch on the base




## SPECIFICATIONS

WATTS	MAX 8
DELIVERED LUMENS	MAX 1000
LAMP SHAPE	A19
GLASS SHADE	OPAL
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4¼"
MAXIMUM DIAMETER	2½"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	14 YEARS
ENERGY COST @10.65¢/kWh†	\$0.93 / YEAR
WARRANTY	2 YRS / 12,000 HRS

† Refers to Estimated annual cost




DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 5CCT (2700K/3000K/3500K/4000K/500K)	<b>DA19CCTWP8T</b>		

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.



### TRILIGHT SWITCH

LOW  
MEDIUM  
MAXIMUM



**E26**

**A19**

**COLOUR TEMPERATURE SELECTABLE 100W EQUIVALENT**



**5CCT Model**



**5CCT Switch on the base**




**SPECIFICATIONS**

WATTS	8
DELIVERED LUMENS	1055
LAMP SHAPE	A19
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4 5/8"
MAXIMUM DIAMETER	2 3/8"
CRI	90+
BEAM ANGLE	360°
JAB8 CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	14 YEARS
ENERGY COST @10.65¢/kWh†	\$0.93 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 5CCT (2700K/3000K/3500K/4000K/5000K) · LUMENS 1055	<b>DA19CCTW8B</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
  - INCONSISTENT DIMMING TRANSITION
  - ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

LEGRAND ADORNE SOFTAP ADTP703U

LUTRON MAESTRO MACL-153MH

LUTRON DIVA® / DIVA® C.L DVWCL-153PH

LEVITON DECORA SURESLIDE®

LUTRON C.L SKYLARK CONTOUR CTL -153P

LUTRON CASETA® WIRELESS

LEVITON DECORA ROCKER SLIDE



LEVITON DECORA SMART™

LUTRON MAESTRO PRO MA-PRO-WH

2 BULBS						5 BULBS						30 BULBS					
MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX




[dvcana.com/product/da19cctw8b/](https://dvcana.com/product/da19cctw8b/)

**E26****A19****OPAL COLOUR TEMPERATURE SELECTABLE 100W EQUIVALENT****5CCT Model****5CCT Switch on the base****SPECIFICATIONS**

WATTS	8
DELIVERED LUMENS	1055
LAMP SHAPE	A19
GLASS SHADE	OPAL*
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4 <sup>5</sup> / <sub>8</sub> "
MAXIMUM DIAMETER	2 <sup>3</sup> / <sub>8</sub> "
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	14 YEARS
ENERGY COST @10.65¢/kWh†	\$0.93 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 5CCT (2700K/3000K/3500K/4000K/500K) · LUMENS 1055	<b>DA19CCTWP8B</b>		

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

LEGRAND ADORNE SOFTAP ADTP703U

LUTRON MAESTRO MACL-153MH

LUTRON DIVA® / DIVA® C.L DVWCL-153PH

LEVITON DECORA SURESLIDE®

LUTRON C.L SKYLARK CONTOUR CTL -153P

LUTRON CASETA® WIRELESS

LEVITON DECORA ROCKER SLIDE

LEVITON DECORA SMART™

LUTRON MAESTRO PRO MA-PRO-WH

2 BULBS						5 BULBS						30 BULBS					
MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX



dvcanada.com/product/da19cctwp8b/

**E26**

**A19**

**CLEAR LED 75W EQUIVALENT**



H 4 1/4"

Ø 2 3/8"

**PACKAGING**



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	7.5
DELIVERED LUMENS	775-850
LAMP SHAPE	A19
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4 1/4"
MAXIMUM DIAMETER	2 3/8"
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.87 / YEAR
WARRANTY	3 YRS /12,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 2700 KELVIN · LUMENS 775	<b>DA1927C8A</b>		
● 3000 KELVIN · LUMENS 800	<b>DA1930C8A</b>		
● 3500 KELVIN · LUMENS 812	<b>DA1935C8A</b>		
● 4000 KELVIN · LUMENS 825	<b>DA1940C8A</b>		
● 5000 KELVIN · LUMENS 850	<b>DA1950C8A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**


- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	•	✓	✓

**E26****A19****OPAL LED 75W EQUIVALENT**

H 4¼"

Ø 2⅜"

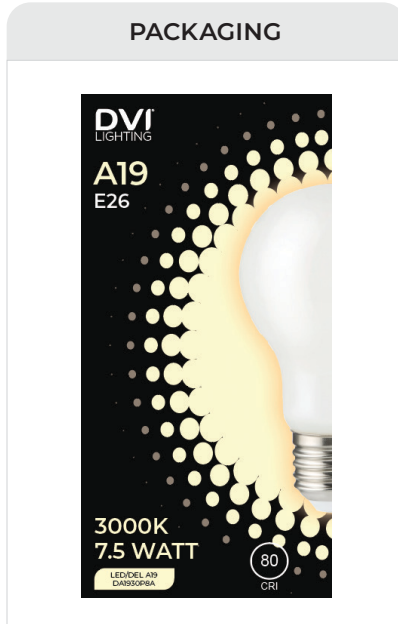**PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	7.5
DELIVERED LUMENS	725-775
LAMP SHAPE	A19
GLASS SHADE	OPAL*
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4¼"
MAXIMUM DIAMETER	2⅜"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.87 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 2700 KELVIN · LUMENS 725	<b>DA1927P8A</b>		
● 3000 KELVIN · LUMENS 750	<b>DA1930P8A</b>		
● 3500 KELVIN · LUMENS 760	<b>DA1935P8A</b>		
● 4000 KELVIN · LUMENS 775	<b>DA1940P8A</b>		

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LUTRON SUNNATA STCL-153PH-WH-C		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	•	✓	✓	✓

**E26****A19****CLEAR IVORY LED 75W EQUIVALENT**

H 4¼"

Ø 2¾"

**PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	7.5
DELIVERED LUMENS	800
LAMP SHAPE	A19
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4¼"
MAXIMUM DIAMETER	2¾"
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.87 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 3000 KELVIN · LUMENS 800	<b>DA1930W8A</b>		
● 4000 KELVIN · LUMENS 800	<b>DA1940W8A</b>		
● 5000 KELVIN · LUMENS 800	<b>DA1950W8A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**


- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

**E26****A19****OPAL IVORY 90 CRI LED 100W EQUIVALENT**

H 4¼"

Ø 2⅜"

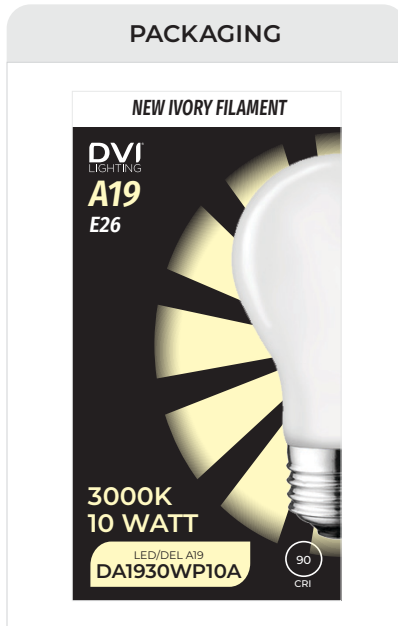**PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	10
DELIVERED LUMENS	1000
LAMP SHAPE	A19
GLASS SHADE	OPAL*
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4¼"
MAXIMUM DIAMETER	2⅜"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	NO
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.99 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost

**DESCRIPTION****ACTIVE CODE****SCHEDULED SKU UPDATE****SCHEDULED NEW CODE**

●	3000 KELVIN · LUMENS 1000	<b>DA1930WP10A</b>
---	---------------------------	--------------------

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

**E26**

**A19**

**CLEAR IVORY 90 CRI LED 100W EQUIVALENT**



H 4¼"

Ø 2⅜"



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	10
DELIVERED LUMENS	1000
LAMP SHAPE	A19
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4¼"
MAXIMUM DIAMETER	2⅜"
CRI	90+
BEAM ANGLE	360°
JA8 CERTIFIED	NO
ENCLOSED RATED	NO
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.99 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
3000 KELVIN · LUMENS 1000	<b>DA1930W10A</b>		
4000 KELVIN · LUMENS 1000	<b>DA1940W10A</b>		
5000 KELVIN · LUMENS 1000	<b>DA1950W10A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	•	•	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	•	•	•	✓	✓	✓	•	✓	✓	✓	✓	✓	•	•	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

**E26****A19****CLEAR IVORY 90 CRI LED 150W EQUIVALENT**

H 4¼"

Ø 2¾"

**PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	12
DELIVERED LUMENS	1500
LAMP SHAPE	A19
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4¼"
MAXIMUM DIAMETER	2¾"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	NO
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$1.40 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost

**DESCRIPTION****ACTIVE CODE****SCHEDULED SKU UPDATE****SCHEDULED NEW CODE**

3000 KELVIN · LUMENS 1500

**DA1930W12A****DIMMABILITY DATA / DONNÉES DE GRADATION**


- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

**E26****A19****OPAL IVORY 90 CRI LED 150W EQUIVALENT**

H 3¼"

Ø 2⅜"

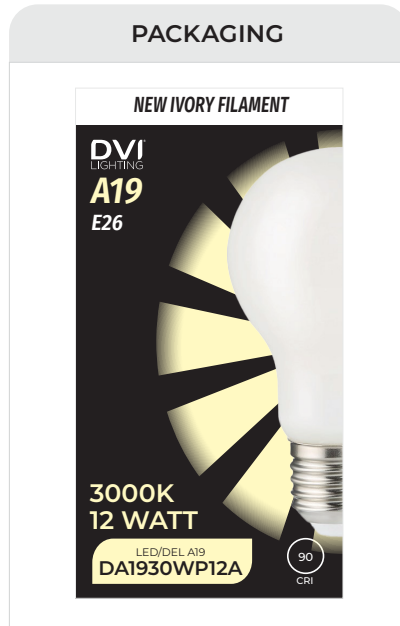**PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	12
DELIVERED LUMENS	1500
LAMP SHAPE	A19
GLASS SHADE	OPAL
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	3¼"
MAXIMUM DIAMETER	2⅜"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	NO
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	46 YEARS
ENERGY COST @10.65¢/kWh†	\$1.40 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 3000 KELVIN · LUMENS 1500	<b>DA1930WP12A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**


- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT



**E26**

**ST17**

**SMALL EDISON LED 40W EQUIVALENT**

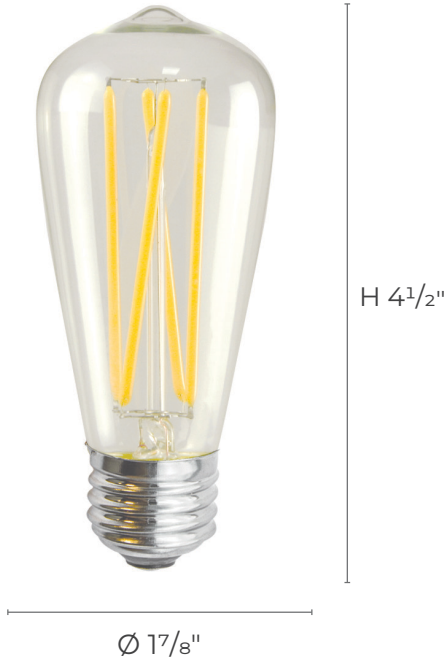

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

SPECIFICATIONS	
WATTS	4
DELIVERED LUMENS	450-500
LAMP SHAPE	ST17
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4 1/2"
MAXIMUM DIAMETER	1 7/8"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.47 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 2200 KELVIN · LUMENS 450	<b>D61118A</b>		
● 2700 KELVIN · LUMENS 500	<b>D61128A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	^	✓	✓	✓
LEVITON DECORA SURESLIDE®				MIN	✓	✓		MIN	^	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓

E26

ST17

# EDISON IVORY LED 75W EQUIVALENT



H 4<sup>3</sup>/<sub>8</sub>"

Ø 1<sup>7</sup>/<sub>8</sub>"

## PACKAGING





NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

## SPECIFICATIONS

WATTS	7.5
DELIVERED LUMENS	750
LAMP SHAPE	ST17
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4 <sup>3</sup> / <sub>8</sub> "
MAXIMUM DIAMETER	1 <sup>7</sup> / <sub>8</sub> "
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.87 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 3000 KELVIN · LUMENS 750	<b>DSTI730W8A</b>		
 4000 KELVIN · LUMENS 750	<b>DSTI740W8A</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓


**E26**

**ST18**

**“VINTAGE” TUNGSTEN 60W INCANDESCENT**



**PACKAGING**

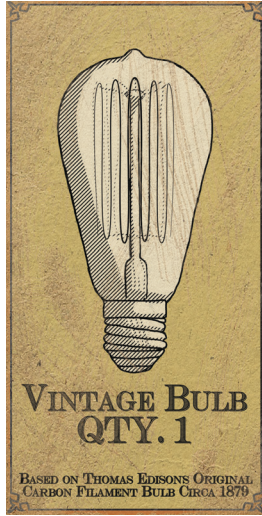

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	60
DELIVERED LUMENS	300
LAMP SHAPE	ST18
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	5 1/4"
MAXIMUM DIAMETER	2 1/4"
CRI	N/A
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	NO
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	1.8 YEARS
ENERGY COST @10.65¢/kWh†	\$7 / YEAR
WARRANTY	1 YR / 2,500 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 2200 KELVIN · 60 WATTS	DVIBAI960CARB		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

E26

ST19

COLOUR TEMPERATURE SELECTABLE 100W EQUIVALENT



H 6"

Ø 2 1/2"

NOTE: image as reference only, real product may vary

5CCT Model



5CCT Switch on the base




SPECIFICATIONS

WATTS	8
DELIVERED LUMENS	1055
LAMP SHAPE	ST19
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	6"
MAXIMUM DIAMETER	2 1/2"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	14 YEARS
ENERGY COST @10.65¢/kWh†	\$0.93 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 CLEAR - 5CCT (2700K/3000K/3500K/4000K/500K) · LUMENS 1055	<b>DST19CCTW8B</b>		

DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

LEGRAND ADORNE SOFTAP ADTP703U
LUTRON MAESTRO MACL-153MH
LUTRON DIVA® / DIVA® C.L DVWCL-153PH
LEVITON DECORA SURESLIDE®
LUTRON C.L SKYLARK CONTOUR CTL -153P
LUTRON CASETA® WIRELESS
LEVITON DECORA ROCKER SLIDE
LEVITON DECORA SMART™
LUTRON MAESTRO PRO MA-PRO-WH

2 BULBS						5 BULBS						30 BULBS					
MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX



dvcana.com/product/dst19cctw8b/

**E26****ST19****EDISON LED 60W EQUIVALENT****PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	6.5
DELIVERED LUMENS	700
LAMP SHAPE	ST19
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	5 1/2"
MAXIMUM DIAMETER	2 1/2"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.76 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

	DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
●	2200 KELVIN · LUMENS 700	<b>D62118A</b>		
●	2700 KELVIN · LUMENS 700	<b>DST1927C7A</b>		
●	3000 KELVIN · LUMENS 700	<b>D62138A</b>		
●	3500 KELVIN · LUMENS 700	<b>DST1935C7A</b>		
●	5000 KELVIN · LUMENS 700	<b>D62158A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			MIN	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	MAX					✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	MAX					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	X	X	X	X	X	X	✓	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓

E26

ST19

# EDISON IVORY LED 60W EQUIVALENT



H 5¾"

Ø 2½"



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

## SPECIFICATIONS

WATTS	7.5
DELIVERED LUMENS	750
LAMP SHAPE	ST19
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	5¾"
MAXIMUM DIAMETER	2½"
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.87 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 3000 KELVIN · LUMENS 750	<b>DSTI930W8A</b>		
● 4000 KELVIN · LUMENS 750	<b>DSTI940W8A</b>		
● 5000 KELVIN · LUMENS 750	<b>DSTI950W8A</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

**E26**

**ST19**



**OPAL EDISON LED 60W EQUIVALENT**



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

SPECIFICATIONS	
WATTS	6.5
DELIVERED LUMENS	650
LAMP SHAPE	ST19
GLASS SHADE	OPAL <sup>*</sup>
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	5 1/2"
MAXIMUM DIAMETER	2 1/2"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.75 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost


DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 3000 KELVIN · LUMENS 650	<b>D63138A</b>		
 4000 KELVIN · LUMENS 650	<b>D63148A</b>		

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-Glass counterparts and cannot be directly compared due to glass differences.

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			MIN	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	MAX					✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	MAX					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	X	X	X	X	X	X	✓	^	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓

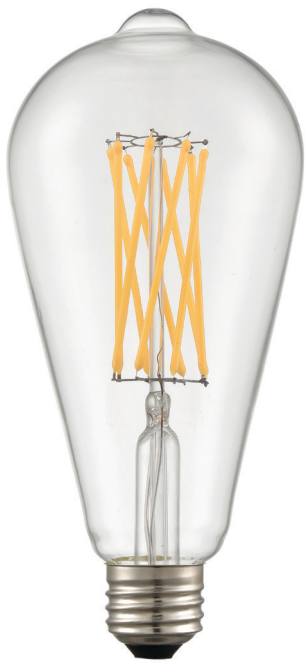
**E26****ST25****OVERSIZE EDISON LED 100W EQUIVALENT**H 6<sup>7</sup>/<sub>8</sub>"Ø 3<sup>1</sup>/<sub>4</sub>"**PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	8
DELIVERED LUMENS	1000
LAMP SHAPE	ST25
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	6 <sup>7</sup> / <sub>8</sub> "
MAXIMUM DIAMETER	3 <sup>1</sup> / <sub>4</sub> "
CRI	80+
BEAM ANGLE	360°
JAB8 CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.93 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 3000 KELVIN · LUMENS 1000	<b>D64238A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	^	✓	^	✓	✓	✓	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	^	^	^	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	^	^	^	^	^	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	^	✓	✓	✓	✓	^	^	^	^	^	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	^	^	^	^	^	^	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	^	^	^	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	^	^	✓	✓	✓	✓	^	^	^	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓




**E26****T10****CLEAR 5in LED 40W EQUIVALENT**H 5<sup>1</sup>/<sub>4</sub>"Ø 1<sup>3</sup>/<sub>4</sub>"**PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	3
DELIVERED LUMENS	400
LAMP SHAPE	T10
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	5 <sup>1</sup> / <sub>4</sub> "
MAXIMUM DIAMETER	1 <sup>3</sup> / <sub>4</sub> "
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.35 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

	DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
	2200 KELVIN · LUMENS 400	<b>D72018A</b>		
	2700 KELVIN · LUMENS 400	<b>D72028A</b>		
	5000 KELVIN · LUMENS 400	<b>DVT10MC50A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	MAX				✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®		MIN	MAX				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	MAX				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓

**E26****T10****CLEAR IVORY 5in LED 40W EQUIVALENT**

H 5 1/8"

Ø 1 1/4"

**PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	4
DELIVERED LUMENS	400
LAMP SHAPE	T10
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	5 1/8"
MAXIMUM DIAMETER	1 1/4"
CRI	80+
BEAM ANGLE	360°
JAB8 CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.47 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost

	DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
●	3000 KELVIN · LUMENS 400	<b>DT1030SW4A</b>		
●	4000 KELVIN · LUMENS 400	<b>DT1040SW4A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

**E26**

**T10**

**OPAL 5in LED 35W EQUIVALENT**



H 5"

Ø 1 1/4"

**PACKAGING**



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	3
DELIVERED LUMENS	375
LAMP SHAPE	T10
GLASS SHADE	OPAL <sup>1</sup>
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	5"
MAXIMUM DIAMETER	1 1/4"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.35 / YEAR
WARRANTY	3 YRS / 12,000 HRS

<sup>1</sup> Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 3000 KELVIN · LUMENS 375	<b>DT1030P4A</b>		

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-Glass counterparts and cannot be directly compared due to glass differences.

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	MAX				✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®		MIN	MAX				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	MAX				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓

**E26****T10****CLEAR 9in 90 CRI LED 60W EQUIVALENT**

H 9"

Ø 1 1/4"

**PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	6
DELIVERED LUMENS	700
LAMP SHAPE	T10
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	9"
MAXIMUM DIAMETER	1 1/4"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.70 / YEAR
WARRANTY	3 YRS / 12,000 HRS


† Refers to Estimated annual cost

	DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
	2700 KELVIN · LUMENS 700	<b>D77129A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	X	X	X	X	X	X	X
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	^	✓	MAX			✓	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	MAX			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	•	✓	•	✓	✓	✓	•	✓	•	✓	✓	✓	✓	✓	✓

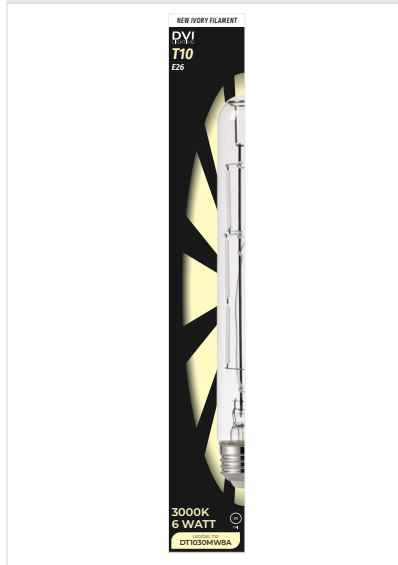

**E26****T10****CLEAR IVORY 9in LED 60W EQUIVALENT**H 8<sup>7</sup>/<sub>8</sub>"Ø 1<sup>1</sup>/<sub>4</sub>"**PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	6
DELIVERED LUMENS	550
LAMP SHAPE	T10
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	8 <sup>7</sup> / <sub>8</sub> "
MAXIMUM DIAMETER	1 <sup>1</sup> / <sub>4</sub> "
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.70 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 3000 KELVIN · LUMENS 550	<b>DT1030MW8A</b>		
 4000 KELVIN · LUMENS 550	<b>DT1040MW8A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**


- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

**E26**

**T10**

**CLEAR 12in LED 60W EQUIVALENT**

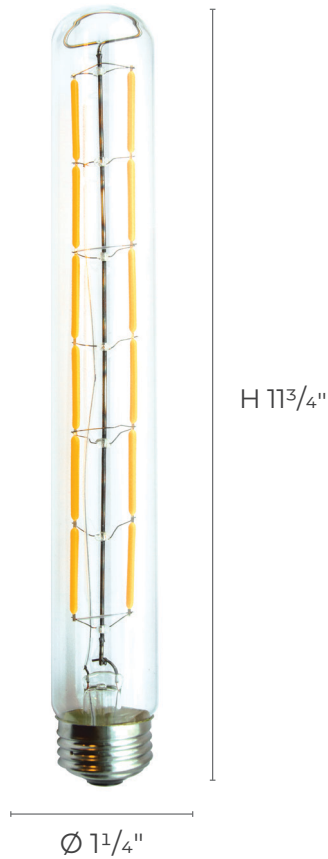


NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	6
DELIVERED LUMENS	550
LAMP SHAPE	T10
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	11 3/4"
MAXIMUM DIAMETER	1 1/4"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.70 / YEAR
WARRANTY	3 YRS / 12,000 HRS



† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 2200 KELVIN · LUMENS 550	<b>DVIBLEDCAT10L2R</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	X	X	X	X	X	X	✓	✓	^	✓	✓	✓	✓	^	^	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	MAX	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	X	X	X	X	X	X	✓	✓	✓	✓	✓	✓	✓	✓	^	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	X	X	X	X	X	X	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	✓	✓	✓	✓	✓	✓	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	X	X	X	X	X	X	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	•	✓	•	✓	✓	✓	•	✓	•	✓	•	✓	✓	✓

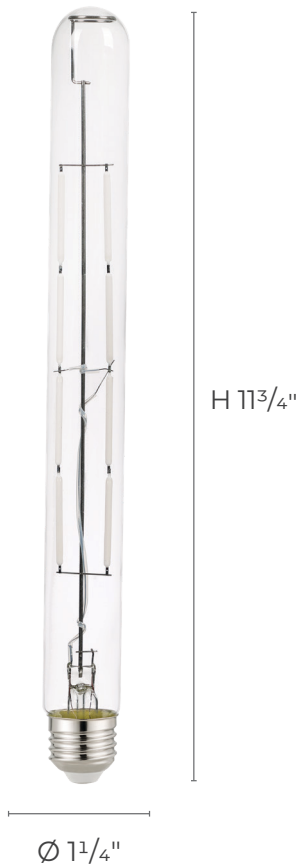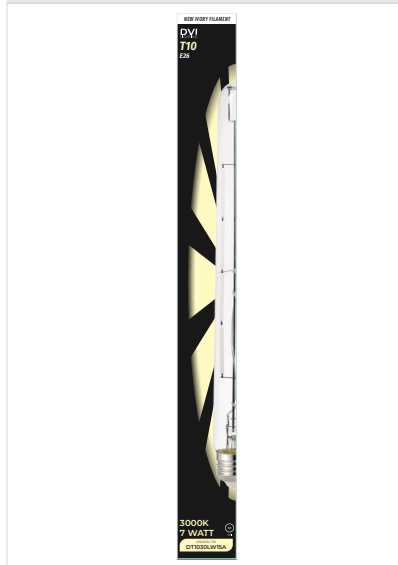**E26****T10****CLEAR IVORY 12in LED 60W EQUIVALENT****PACKAGING****SPECIFICATIONS**

WATTS	7
DELIVERED LUMENS	700
LAMP SHAPE	T10
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	11 <sup>3</sup> / <sub>4</sub> "
MAXIMUM DIAMETER	1 <sup>1</sup> / <sub>4</sub> "
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.82 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost

	DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
●	3000 KELVIN · LUMENS 700	<b>DT1030LW15A</b>		
●	4000 KELVIN · LUMENS 700	<b>DT1040LW15A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

**E26**

**T14**

**CLEAR 5.5in LED 75W EQUIVALENT**



H 5 1/4"

Ø 1 3/4"

**PACKAGING**



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	7
DELIVERED LUMENS	800
LAMP SHAPE	T14
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	5 1/4"
MAXIMUM DIAMETER	1 3/4"
CRI	80+
BEAM ANGLE	360°
JAB8 CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.82 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 2700 KELVIN · LUMENS 800	<b>DVT14MC27A</b>		
● 3000 KELVIN · LUMENS 800	<b>D73238A</b>		
● 4000 KELVIN · LUMENS 800	<b>DT1440C8A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			MIN	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	MAX	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	X	^	✓	✓	✓	✓	✓	✓	✓	✓	MAX	✓	^	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓

E26

T14


# OPAL 5.5in LED 60W EQUIVALENT



H 5 1/4"

Ø 1 3/4"

## PACKAGING

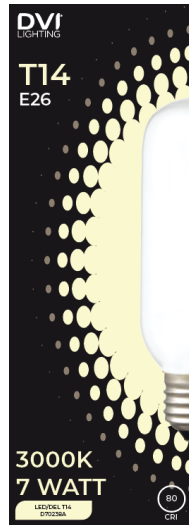



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

## SPECIFICATIONS

WATTS	7
DELIVERED LUMENS	725-750
LAMP SHAPE	T14
GLASS SHADE	OPAL*
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	5 1/4"
MAXIMUM DIAMETER	1 3/4"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.82 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 3000 KELVIN · LUMENS 725	<b>D70238A</b>		
 4000 KELVIN · LUMENS 750	<b>DVT14MT40A</b>		

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-Glass counterparts and cannot be directly compared due to glass differences.

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			MIN	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	MAX	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	X	^	✓	✓	✓	✓	✓	✓	✓	✓	MAX	✓	^	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓

**E26**

**T14**

**CLEAR 8in LED 100W EQUIVALENT**



H 7 7/8"

Ø 1 3/4"

**PACKAGING**



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	8
DELIVERED LUMENS	1200-1240
LAMP SHAPE	T14
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	7 7/8"
MAXIMUM DIAMETER	1 3/4"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.93 / YEAR
WARRANTY	3 YRS / 12,000 HRS


† Refers to Estimated annual cost

	DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
●	2700 KELVIN · LUMENS 1200	<b>DVT14MC27B</b>	OCTOBER 2025	<b>DT1427C12A</b>
●	3000 KELVIN · LUMENS 1200	<b>D74238A</b>		
●	4000 KELVIN · LUMENS 1240	<b>DVT14MC40B</b>	DECEMBER 2025	<b>DT1440C12A</b>

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	MIN	✓	^	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	X	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	^	^	^	^	^	^	^	^	^	^	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	^	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	^	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓

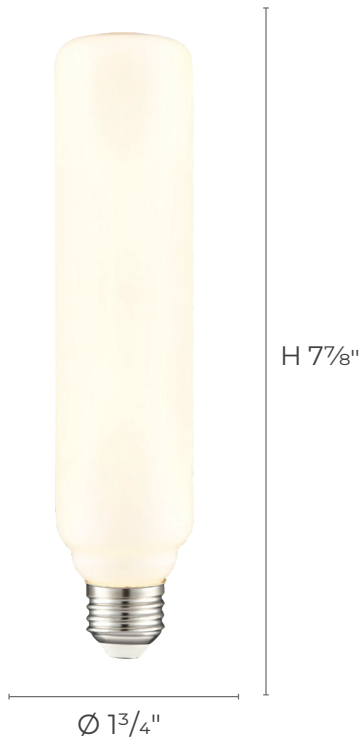**E26****T14****OPAL 8in LED 100W EQUIVALENT**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	<b>8</b>
DELIVERED LUMENS	<b>1100</b>
LAMP SHAPE	<b>T14</b>
GLASS SHADE	<b>OPAL*</b>
BASE / ANSI BASE	<b>MEDIUM / E26</b>
MAXIMUM HEIGHT	<b>7 7/8"</b>
MAXIMUM DIAMETER	<b>1 3/4"</b>
CRI	<b>80+</b>
BEAM ANGLE	<b>360°</b>
JAB CERTIFIED	<b>NO</b>
ENCLOSED RATED	<b>YES</b>
OPERATING TEMP.	<b>-20° C TO 45° C</b>
CASE QUANTITY	<b>12/144</b>
LIFE CYCLE @ 3 HRS/DAY	<b>18 YEARS</b>
ENERGY COST @10.65¢/kWh†	<b>\$0.93 / YEAR</b>
WARRANTY	<b>3 YRS / 12,000 HRS</b>

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
3000 KELVIN · LUMENS 1100	<b>DT1430PT1A</b>		

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-Glass counterparts and cannot be directly compared due to glass differences.

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	MIN	✓	^	✓	✓	✓	✓	^	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	X	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	^	^	^	^	^	^	^	^	^	^	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	^	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓

**E26****G25****CLEAR IVORY LED 100W EQUIVALENT**H 4<sup>5</sup>/<sub>8</sub>"Ø 3<sup>1</sup>/<sub>8</sub>"**PACKAGING**



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	10
DELIVERED LUMENS	1000
LAMP SHAPE	G25
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4 <sup>5</sup> / <sub>8</sub> "
MAXIMUM DIAMETER	3 <sup>1</sup> / <sub>8</sub> "
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$1.17 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 3000 KELVIN · LUMENS 1000	<b>DG2530W10A</b>		
 4000 KELVIN · LUMENS 1000	<b>DG2540W10A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

**E26****G25****OPAL IVORY LED 100W EQUIVALENT**H 4<sup>3</sup>/<sub>4</sub>"Ø 3<sup>1</sup>/<sub>8</sub>"**PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	10
DELIVERED LUMENS	950
LAMP SHAPE	G25
GLASS SHADE	OPAL <sup>†</sup>
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4 <sup>3</sup> / <sub>4</sub> "
MAXIMUM DIAMETER	3 <sup>1</sup> / <sub>8</sub> "
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/36
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$1.17 / YEAR
WARRANTY	3 YRS / 20,000 HRS

<sup>†</sup> Refers to Estimated annual cost**DESCRIPTION****ACTIVE CODE****SCHEDULED SKU UPDATE****SCHEDULED NEW CODE**

	3000 KELVIN · LUMENS 950	<b>DG2530WP10A</b>	
	4000 KELVIN · LUMENS 950	<b>DG2540WP10A</b>	

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-Glass counterparts and cannot be directly compared due to glass differences.

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

**E26**

**G25**

**CLEAR LED 75W EQUIVALENT**



H 4<sup>3</sup>/<sub>4</sub>"

Ø 3<sup>1</sup>/<sub>8</sub>"

**PACKAGING**



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	8
DELIVERED LUMENS	850
LAMP SHAPE	G25
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4 <sup>3</sup> / <sub>4</sub> "
MAXIMUM DIAMETER	3 <sup>1</sup> / <sub>8</sub> "
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.93 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 5000 KELVIN · LUMENS 850	<b>DVG25MC50A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

**E26**

**G25**

# HALF PLATED LED 60W EQUIVALENT



H 4<sup>3</sup>/<sub>4</sub>"

Ø 3<sup>1</sup>/<sub>8</sub>"

## PACKAGING



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

## SPECIFICATIONS

WATTS	8
DELIVERED LUMENS	600*
LAMP SHAPE	G25
GLASS SHADE	HALF GOLD
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4 <sup>3</sup> / <sub>4</sub> "
MAXIMUM DIAMETER	3 <sup>1</sup> / <sub>8</sub> "
CRI	80+
BEAM ANGLE	180°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.93 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

## DESCRIPTION

## ACTIVE CODE

## SCHEDULED SKU UPDATE

## SCHEDULED NEW CODE



3000 KELVIN · LUMENS 600  
HALF GOLD

**DVILG2530G6A**

\* Diminished lumen output due to opaque metallic plating

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	X	X	X	X	X	X	X
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	^	✓	MAX			✓	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	MAX			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	•	✓	•	✓	✓	✓	•	✓	•	✓	✓	✓	✓	✓	✓

**E26****G40****CLEAR IVORY LED 100W EQUIVALENT**

H 6½"

Ø 47/8"

**PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	10
DELIVERED LUMENS	1000
LAMP SHAPE	G40
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	6½"
MAXIMUM DIAMETER	47/8"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/36
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.82/ YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
3000 KELVIN · LUMENS 1000	DG4030W10A		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

^This chart is for D-452x8A series only - for DVLG40MCxxA charts, please flip to Page 82 for superceded data

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

**E26****G40****OPAL IVORY LED 100W EQUIVALENT**

H 6½"

Ø 47/8"

**PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	10
DELIVERED LUMENS	950
LAMP SHAPE	G40
GLASS SHADE	OPAL*
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	6½"
MAXIMUM DIAMETER	47/8"
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/36
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.82 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost

**DESCRIPTION****ACTIVE CODE****SCHEDULED SKU UPDATE****SCHEDULED NEW CODE**

3000 KELVIN · LUMENS 950

**DG4030WP10A**

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT


\*This chart is for D462x8A series only - for DVLG40MTxxA charts, please flip to Page 82 for superceded data

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

**E26****A165****CLEAR "JUPITER" 90 CRI LED 100W EQUIVALENT**

H 12"

Ø 6¾"

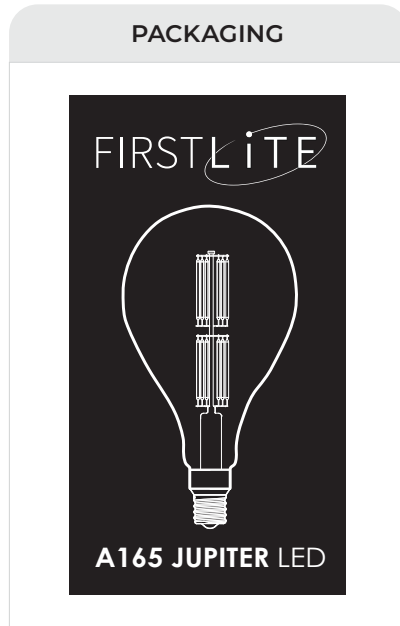**PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	10
DELIVERED LUMENS	1100
LAMP SHAPE	A165
GLASS SHADE	CLEAR
BASE / ANSI BASE	E26
MAXIMUM HEIGHT	12"
MAXIMUM DIAMETER	6¾"
CRI	90+
BEAM ANGLE	360°
JA8 CERTIFIED	YES
ENCLOSED RATED	NO
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	4
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$1.17 / YEAR
WARRANTY	5 YRS / 20,000 HRS

† Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
3000 KELVIN - LUMENS 1100	DVLA165MC30A		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

^This chart is for D452x8A series only - for DVLG40MCxxA charts, please flip to Page 82 for superceded data

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		MIN	✓	✓	✓	✓							
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓							
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓							

TESTING UNAVAILABLE

**E26****A165****OPAL "JUPITER" 90 CRI LED 100W EQUIVALENT****PACKAGING**

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	10
DELIVERED LUMENS	1050
LAMP SHAPE	A165
GLASS SHADE	OPAL*
BASE / ANSI BASE	E26
MAXIMUM HEIGHT	12"
MAXIMUM DIAMETER	6 3/4"
CRI	90+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	NO
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	4
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$1.17 / YEAR
WARRANTY	5 YRS / 20,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
3000 KELVIN · LUMENS 1050	<b>DVLA165MT30A</b>		

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

\*This chart is for D462x8A series only - for DVLG40MTxxA charts, please flip to Page 82 for superceded data

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		MIN	✓	✓	✓	✓							
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓							
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓							

TESTING UNAVAILABLE

# G9

## CLEAR LONGLIFE LED 40W EQUIVALENT



### PACKAGING



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

### SPECIFICATIONS

WATTS	3
DELIVERED LUMENS	375-385
LAMP SHAPE	G9
GLASS SHADE	CLEAR
BASE / ANSI BASE	DOUBLE LOOP / G9
MAXIMUM HEIGHT	2"
MAXIMUM DIAMETER	5/8"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.35 / YEAR
WARRANTY	3 YRS / 8,000 HRS

† Refers to Estimated annual cost

	DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
●	3000 KELVIN · LUMENS 375	<b>D90138B</b>		
●	4000 KELVIN · LUMENS 380	<b>D90148B</b>		
●	5000 KELVIN · LUMENS 385	<b>D90158B</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT


	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C	^	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON MAESTRO MACL-153MH	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH			MIN	✓	✓	✓			MIN	✓	✓	✓			MIN	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	•	✓	✓	✓	^
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

# G9

## FROSTED LONGLIFE LED 35W EQUIVALENT



### PACKAGING

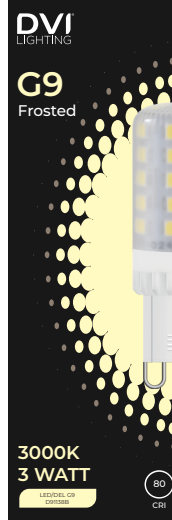

NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

### SPECIFICATIONS

WATTS	3
DELIVERED LUMENS	350-365
LAMP SHAPE	G9
GLASS SHADE	FROSTED*
BASE / ANSI BASE	DOUBLE LOOP / G9
MAXIMUM HEIGHT	2"
MAXIMUM DIAMETER	5/8"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.35 / YEAR
WARRANTY	3 YRS / 8,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
● 3000 KELVIN · LUMENS 350	<b>D91138B</b>		
● 4000 KELVIN · LUMENS 365	<b>DG940F4A</b>		

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C	^	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON MAESTRO MACL-153MH	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH			MIN	✓	✓	✓			MIN	✓	✓	✓			MIN	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	•	✓	✓	✓	^
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

# G9

## CLEAR LED 50W EQUIVALENT



H 2"

Ø 5/8"

### PACKAGING



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

### SPECIFICATIONS

WATTS	4.5
DELIVERED LUMENS	540-550
LAMP SHAPE	G9
GLASS SHADE	CLEAR
BASE / ANSI BASE	DOUBLE LOOP / G9
MAXIMUM HEIGHT	2"
MAXIMUM DIAMETER	5/8"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.52 / YEAR
WARRANTY	2 YRS / 8,000 HRS

† Refers to Estimated annual cost

	DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
●	2700 KELVIN · LUMENS 540	DG927C5B		
●	3000 KELVIN · LUMENS 550	D92138B		
●	4000 KELVIN · LUMENS 550	D92148B		
●	5000 KELVIN · LUMENS 550	D92158B		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C	^	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON MAESTRO MACL-153MH	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH			MIN	✓	✓	✓			MIN	✓	✓	✓			MIN	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	^	•	•	✓	✓	✓	^
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

# G9

## "CUT CRYSTAL" LED 50W EQUIVALENT



H 2"

Ø 3/4"

### PACKAGING



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

### SPECIFICATIONS

WATTS	5.6
DELIVERED LUMENS	525-575
LAMP SHAPE	G9
GLASS SHADE	CLEAR
BASE / ANSI BASE	DOUBLE LOOP / G9
MAXIMUM HEIGHT	2"
MAXIMUM DIAMETER	3/4"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.65 / YEAR
WARRANTY	2 YRS / 8,000 HRS

† Refers to Estimated annual cost

### DESCRIPTION

### ACTIVE CODE

### SCHEDULED SKU UPDATE


### SCHEDULED NEW CODE

●	2700 KELVIN · LUMENS 525	<b>DVG9BB27A</b>
●	3000 KELVIN · LUMENS 550	<b>D93138A</b>
●	4000 KELVIN · LUMENS 575	<b>D93148A</b>
●	5000 KELVIN · LUMENS 575	<b>DVG9BB50A</b>

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			MIN	✓	✓	✓			MIN	✓	^	^	X	X	X	X	X	X	X
LUTRON DIVA® / DIVA® C.L DVWCL-153PH			MIN	✓	MAX		✓	✓	^	✓	^	X	✓	^	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®		MIN	✓	✓	✓	✓	^	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P		MIN	•	✓	✓	✓	^	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X		MIN	^	^	^	✓	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE			MIN	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	X	X	X	X	X	X	X	X	X	X	X	X	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	•	✓	✓	✓	✓

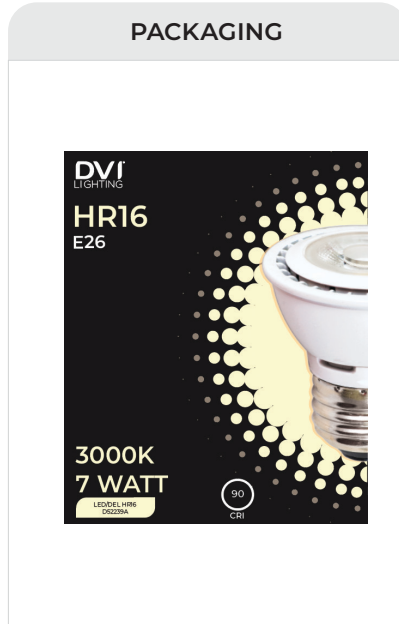**E26****MR16****COB 90 CRI LED 50W EQUIVALENT****PACKAGING**


NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

**SPECIFICATIONS**

WATTS	7
DELIVERED LUMENS	580
LAMP SHAPE	MR16
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	2 <sup>1</sup> / <sub>4</sub> "
MAXIMUM DIAMETER	2"
CRI	90+
BEAM ANGLE	35°
JAB CERTIFIED	YES
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.82 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
 3000 KELVIN · LUMENS 580	<b>D52239A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		✓	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™					MIN	✓	X	X	X	X	X	X	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓

**GU5.3**

**MR16**

**“UTILITY” MCOB 35W EQUIVALENT**



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

SPECIFICATIONS	
WATTS / VOLTAGE	5W / 12V
DELIVERED LUMENS	400
LAMP SHAPE	MR16
GLASS SHADE	CLEAR
BASE / ANSI BASE	GU5.3
MAXIMUM HEIGHT	2"
MAXIMUM DIAMETER	2 1/4"
CRI	80+
BEAM ANGLE	35°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.58 / YEAR
WARRANTY	3 YRS / 7,500 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
3000 KELVIN · LUMENS 400	<b>D53138A</b>		
4000 KELVIN · LUMENS 400	<b>DVILM1640M5</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•
LUTRON MAESTRO MACL-153MH				MIN	✓	MAX				MIN	✓	✓	✓	^	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	•	✓	•	MAX		✓	•	✓	✓	MAX				MIN	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	MAX				✓	•	✓	•	✓	✓		^	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	•	•	✓	MAX		✓	•	•	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS				MIN	^	MAX		MIN	^	^	MAX		•	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	•	✓	✓	✓	✓
LEVITON DECORA SMART™				MIN	✓	✓		MIN	^	^	✓	✓	✓	•	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

# GU5.3

# MR16

## COB LED 50W EQUIVALENT



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

SPECIFICATIONS	
WATTS / VOLTAGE	7W / 12V
DELIVERED LUMENS	580
LAMP SHAPE	MR16
GLASS SHADE	CLEAR
BASE / ANSI BASE	GU5.3
MAXIMUM HEIGHT	1 3/4"
MAXIMUM DIAMETER	2 1/4"
CRI	80+
BEAM ANGLE	35°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.82 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
2700 KELVIN · LUMENS 580	<b>DMR1627C6A</b>		
3000 KELVIN · LUMENS 580	<b>D53238A</b>		
4000 KELVIN · LUMENS 580	<b>D53248A</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U			MIN	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH		MIN	^	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P		MIN	✓	✓	✓	✓		MIN	•	•	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓

**GU10**  
**MR16**

**“UTILITY” MCOB LED 35W EQUIVALENT**



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

SPECIFICATIONS	
WATTS	5
DELIVERED LUMENS	400
LAMP SHAPE	MR16
GLASS SHADE	CLEAR
BASE / ANSI BASE	GU10
MAXIMUM HEIGHT	2"
MAXIMUM DIAMETER	2 1/4"
CRI	80+
BEAM ANGLE	35°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.58 / YEAR
WARRANTY	3 YRS / 7,500 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
3000 KELVIN · LUMENS 400	<b>D51138A</b>		
4000 KELVIN · LUMENS 400	<b>D51148A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LUTRON SUNNATA STCL-153PH-WH-C		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•
LUTRON MAESTRO MACL-153MH				MIN	✓	MAX				MIN	✓	✓	✓	^	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	•	✓	•	MAX		✓	•	✓	✓	MAX				MIN	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	MAX				✓	•	✓	•	✓	✓		^	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	•	•	✓	MAX		✓	•	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS				MIN	^	MAX		MIN	^	^	MAX		•	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	•	✓	✓	✓	✓	^
LEVITON DECORA SMART™				MIN	✓	✓		MIN	^	^	✓	✓	✓	•	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

**GU10**  
**MR16**

**COB 90 CRI LED 50W EQUIVALENT**



NOTE: Refer to image for scale/Se référer à l'image pour l'échelle

SPECIFICATIONS	
WATTS	7
DELIVERED LUMENS	580
LAMP SHAPE	MR16
GLASS SHADE	CLEAR
BASE / ANSI BASE	GU10
MAXIMUM HEIGHT	2 1/4"
MAXIMUM DIAMETER	2"
CRI	90+
BEAM ANGLE	35°
JA8 CERTIFIED	YES
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.82 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
3000 KELVIN · LUMENS 580	<b>D51239A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT


	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U			MIN	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH		MIN	^	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P		MIN	✓	✓	✓	✓		MIN	•	•	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓

**GU10**  
**MR16**

**COLOUR TEMPERATURE SELECTABLE 50W EQUIVALENT**



**5CCT Model**



**5CCT Switch on the base**



SPECIFICATIONS	
WATTS	7
DELIVERED LUMENS	560
LAMP SHAPE	MR16
GLASS SHADE	CLEAR
BASE / ANSI BASE	GU10
MAXIMUM HEIGHT	2"
MAXIMUM DIAMETER	2 1/8"
CRI	80+
BEAM ANGLE	35°
JAB CERTIFIED	YES
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/144
LIFE CYCLE @ 3 HRS/DAY	14 YEARS
ENERGY COST @10.65¢/kWh†	\$0.82 / YEAR
WARRANTY	2 YRS / 15,000 HRS

† Refers to Estimated annual cost



DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
5CCT (2700K/3000K/3500K/4000K/500K) · LUMENS 560	<b>DG10CCTC7A</b>		

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LUTRON SUNNATA STCL-153PH-WH-C		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•
LUTRON MAESTRO MACL-153MH				MIN	✓	MAX				MIN	✓	✓	✓	^	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	•	✓	•	MAX		✓	•	✓	✓	MAX				MIN	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	MAX				✓	•	✓	•	✓	✓		^	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	•	•	✓	MAX		✓	•	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS				MIN	^	MAX		MIN	^	^	MAX		•	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	•	✓	✓	✓	✓	^
LEVITON DECORA SMART™				MIN	✓	✓		MIN	^	^	✓	✓	✓	•	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓



**E26**

**A19**

# 12-PACK CLEAR / OPAL LED 75W EQUIVALENT DIMMABLE



Ø 2 3/8"



Ø 2 3/8"

H 4 1/4"

## SPECIFICATIONS

WATTS	7.5
DELIVERED LUMENS	750-825
LAMP SHAPE	A19
GLASS SHADE	CLEAR / OPAL*
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4 1/4"
MAXIMUM DIAMETER	2 3/8"
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/12
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.87 / YEAR
WARRANTY	2 YRS / 5,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE
3000 KELVIN · LUMENS 800 CLEAR	<b>DMPA1930C8</b>
4000 KELVIN · LUMENS 825 CLEAR	<b>DMPA1940C8</b>

DESCRIPTION	ACTIVE CODE
3000 KELVIN · LUMENS 750 OPAL	<b>DMPA1930P8</b>
4000 KELVIN · LUMENS 775 OPAL	<b>DMPA1940P8</b>

**DVI CORE OFFERING**

Items are bulk packaged for shelf retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 individual sleeve packaged bulbs for a total of 144 bulbs. Bulbs are sold and priced in subcartons (multiples) of 1.

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	•	✓	✓

  
**E26****A19****12-PACK CLEAR / OPAL LED 75W EQUIVALENT NON-DIMMABLE**

H 4 1/4"



Ø 2 3/8"



Ø 2 3/8"

**SPECIFICATIONS**

WATTS	7.5
DELIVERED LUMENS	750-825
LAMP SHAPE	A19
GLASS SHADE	CLEAR / OPAL*
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	4 1/4"
MAXIMUM DIAMETER	2 3/8"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	12/12
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.87 / YEAR
WARRANTY	2 YRS / 5,000 HRS

† Refers to Estimated annual cost


DESCRIPTION	ACTIVE CODE
 3000 KELVIN · LUMENS 800 CLEAR	<b>DMPA1930C8ND</b>
 4000 KELVIN · LUMENS 825 CLEAR	<b>DMPA1940C8ND</b>

DESCRIPTION	ACTIVE CODE
 3000 KELVIN · LUMENS 750 OPAL	<b>DMPA1930P8ND</b>
 4000 KELVIN · LUMENS 775 OPAL	<b>DMPA1940P8ND</b>

**DVI CORE OFFERING**

Items are bulk packaged for shelf retail display. The master carton contains 12 sub-cartons and each sub-carton contains 12 bulk individual sleeve packaged bulbs for a total of 144 bulbs. Bulbs are sold and priced in subcartons (multiples) of 1.

\*Opal/Frosted bulb SKUs may exhibit warmer colour temperatures than their Clear-glass counterparts and cannot be directly compared due to glass differences.

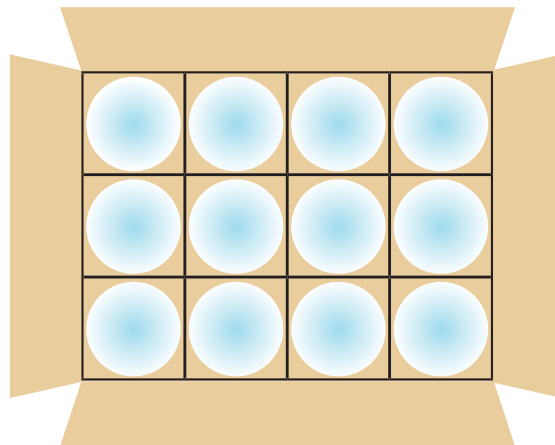

EXAMPLE OF PACKAGING



**E12**

**C35**

# 6-PACK CLEAR CANDELABRA LED 40W EQUIVALENT



H 3<sup>7</sup>/<sub>8</sub>"

Ø 1<sup>3</sup>/<sub>8</sub>"

NOTE: Refe

### DVI CORE OFFERING

Items are bulk packaged for shelf retail display. The master carton contains 24 sub-cartons and each sub-carton contains 6 bulk individual sleeve packaged bulbs for a total of 144 bulbs. Bulbs are sold and priced in subcartons (multiples) of 1.

### SPECIFICATIONS

WATTS	4.4
DELIVERED LUMENS	400-500
LAMP SHAPE	C35
GLASS SHADE	CLEAR
BASE / ANSI BASE	CANDELABRA / E12
MAXIMUM HEIGHT	3 <sup>7</sup> / <sub>8</sub> "
MAXIMUM DIAMETER	1 <sup>3</sup> / <sub>8</sub> "
CRI	80+
BEAM ANGLE	360°
JA8 CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	6/24
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.51 / YEAR
WARRANTY	3 YRS / 12,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
2700 KELVIN · LUMENS 400	<b>DVCT24CC27H</b>		
3000 KELVIN · LUMENS 420	<b>D34138A</b>		
4000 KELVIN · LUMENS 450	<b>DVCT24CC40H</b>		
5000 KELVIN · LUMENS 500	<b>DVCT24CC50H</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			MIN	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH		MIN	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	^	✓	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS		MIN	✓	✓	MAX		✓	✓	✓	✓	✓	✓	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™			MIN	✓	✓	✓		✓	MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓



# 4-PACK CLEAR EDISON IVORY LED 60W EQUIVALENT



H 5 3/4"

Ø 2 1/2"



## DVI CORE OFFERING

Items are bulk packaged for shelf retail display. The master carton contains 36 sub-cartons and each sub-carton contains 4 bulk individual sleeve packaged bulbs for a total of 144 bulbs. Bulbs are sold and priced in subcartons (multiples) of 1.



Individual boxes are suitable for retail sale.

## SPECIFICATIONS

WATTS	7.5
DELIVERED LUMENS	750
LAMP SHAPE	ST19
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	5 3/4"
MAXIMUM DIAMETER	2 1/2"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	4/36
LIFE CYCLE @ 3 HRS/DAY	23 YEARS
ENERGY COST @10.65¢/kWh†	\$0.87 / YEAR
WARRANTY	3 YRS / 20,000 HRS

† Refers to Estimated annual cost

DESCRIPTION	ACTIVE CODE	SCHEDULED SKU UPDATE	SCHEDULED NEW CODE
3000 KELVIN · LUMENS 750	<b>DMPST1930W8</b>		
4000 KELVIN · LUMENS 750	<b>DMPST1940W8</b>		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS							
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX
LUTRON SUNNATA STCL-153PH-WH-C	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON MAESTRO MACL-153MH		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	•
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓		MIN	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓



**E26**

**ST19**

## 4-PACK CLEAR EDISON LED 60W EQUIVALENT



H 5 1/2"

Ø 2 1/2"

### DVI CORE OFFERING

Items are bulk packaged for shelf retail display. The master carton contains 36 sub-cartons and each sub-carton contains 4 bulk individual sleeve packaged bulbs for a total of 144 bulbs. Bulbs are sold and priced in subcartons (multiples) of 1.

### PACKAGING



### SPECIFICATIONS

WATTS	6.5
DELIVERED LUMENS	700
LAMP SHAPE	ST19
GLASS SHADE	CLEAR
BASE / ANSI BASE	MEDIUM / E26
MAXIMUM HEIGHT	5 1/2"
MAXIMUM DIAMETER	2 1/2"
CRI	80+
BEAM ANGLE	360°
JAB CERTIFIED	NO
ENCLOSED RATED	YES
OPERATING TEMP.	-20° C TO 45° C
CASE QUANTITY	4/36
LIFE CYCLE @ 3 HRS/DAY	18 YEARS
ENERGY COST @10.65¢/kWh†	\$0.76 / YEAR
WARRANTY	3 YRS / 12,000 HRS


† Refers to Estimated annual cost

	DESCRIPTION	ACTIVE CODE	ESTIMATED DEPLETION DATE	SCHEDULED NEW CODE
●	3000 KELVIN · LUMENS 750	<b>D66138A</b>		
●	4000 KELVIN · LUMENS 700	<b>D66148A</b>	MARCH 2026	


## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	2 BULBS					5 BULBS					30 BULBS								
	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	MIN	20	40	60	80	MAX	
LEGRAND ADORNE SOFTAP ADTP703U		MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH			MIN	✓	✓	✓			MIN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	MAX					✓	✓	^	✓	✓	✓	✓	✓	✓	^	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	MAX					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	X	X	X	X	X	X	✓	^	✓	✓	✓	✓	✓	^	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	•	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	•	✓	✓	✓	✓	✓	✓



# Did you know that DVI's packaging reflects our colour temperatures?

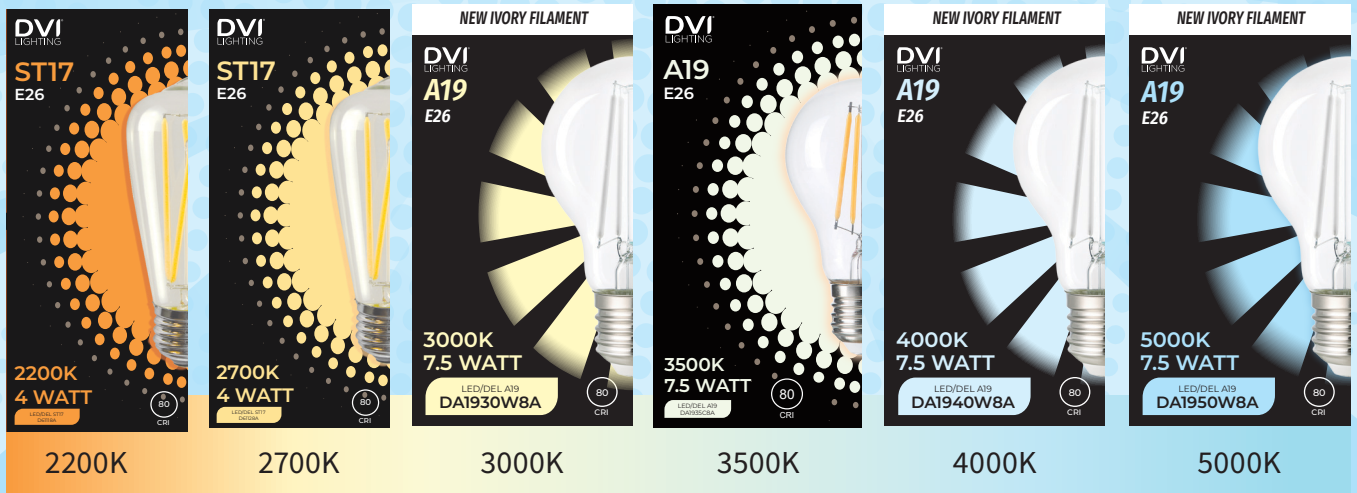

# ACCESSORIES



## ADAPTORS FOR COMMON BULB BASES ADAPTATEURS POUR DOUILLE D'AMPOULE



ORDER CODE / CODE	DVIA2610	DVIA2609	DVIA2612
UPC	61467012593	61467011299	61467114044
BULB BASE / DOUILLE D'AMPOULE	G9	GU10	E12
ADAPTOR BASE /	E26	E26	E26

DVIBULBDISPCT

## BULB ACCESSORIES ACCESSOIRES D'AMPOULE

ORDER CODE / CODE	DVIBULBSUITCASE
DESCRIPTION / DESCRIPTION	BULB SUITCASE / VALISE D'AMPOULES
DIMENSIONS / DIMENSIONS	L 16" X W 12" X H 5"



ORDER CODE / CODE	DVIBULBDISPCT
DESCRIPTION / DESCRIPTION	COUNTER TOP BULB DISPLAY - 6 X E26
DIMENSIONS / DIMENSIONS	Ø 11¾" X H 9"





**ELECTRICAL POWER TO LUMINOUS FLUX CONVERSION TABLE**  
**TABLE DE CONVERSION DU PUISSANCE ÉLECTRIQUE EN FLUX LUMINEUX**

HALOGEN BULB / AMPOULE HALOGÈNE	LED BULB / AMPOULE À DEL
15 W	80-100 LM
25 W	101-200 LM
35 W	201-400 LM
40 W	401-500 LM
60 W	501-750 LM
75 W	750-1000 LM
100 W	1000-1500 LM
150 W	1500-2000 LM

**E12 C35**  
CLEAR CANDELABRA  
IVORY LED

# LED FLAT PANELS



# LED FLAT PANELS STATUS

FAMILY	FAMILY CODE	TYPE	AVAILABLE SIZES	SPECIAL FEATURES	SUMMER 2025	FALL 2025	WINTER 2026	SPRING 2026
<b>AVRO</b>	<b>389</b>	1CCT COLOUR TRIMS IN SN,CH,BR,GR	5", 7", 9", 12"	MAGNETIC HOLDER FOR COLOUR TRIMS	→			
<b>BANSHEE PRO</b>	<b>383</b>	1CCT BLACK/WHITE	5", 7", 9", 12"	SPECIAL ORDER ONLY	ARRIVING LATE FALL 2025		→	
<b>DEHAVILLAND</b>	<b>390</b>	1CCT WHITE	5", 7", 12"	-	DISCONTINUED, REMNANT INVENTORY AVAILBLE			
<b>ELSIE</b>	<b>391</b>	5CCT BLACK/WHITE	12" 12X24"X12X48"	-	→			
<b>FIREFLY</b>	<b>391</b>	1CCT BLACK/WHITE	5", 7", 9", 12"	-	→		DISCONTINUING JANUARY 2026	
<b>HURRICANE</b>	<b>398</b>	5CCT BLACK/WHITE	5", 7", 9", 12", 16", 20"	MAGNETIC HOLDER FOR COLOUR TRIMS (BLACK ONLY)	→			
<b>POLARIS</b>	<b>397</b>	1CCT BLACK/WHITE	5", 7", 9", 12"	-	→			
<b>TYPHOON</b>	<b>396</b>	5CCT BLACK/WHITE	5", 7", 9", 12"	-	→			

### DVP38908

Ø: 5½" x H: ½"

**Finish Shown:** Brass with embedded magnet and trim included



### DVP38918

Ø: 7" x H: ½"

**Finish Shown:** Chrome with embedded magnet and trim included



### DVP38928

Ø: 9" x H: ½"

**Finish Shown:** Graphite with embedded magnet and trim included



### DVP38938

Ø: 12" x H: ½"

**Finish Shown:** Satin Nickel with embedded magnet and trim included



#### ORDER CODES

FINISH	5.5"	7"	9"	12"
BR	DVP38908BR-3K	DVP38918BR-3K	DVP38928BR-3K	DVP38938BR-3K
CH	DVP38908CH-3K	DVP38918CH-3K	DVP38928CH-3K	DVP38938CH-3K
GR	DVP38908GR-3K	DVP38918GR-3K	DVP38928GR-3K	DVP38938GR-3K
SN	DVP38908SN-3K	DVP38918SN-3K	DVP38928SN-3K	DVP38938SN-3K



**FINISH OPTIONS**

- Brass (BR)
- Chrome (CH)
- Graphite (GR)
- Satin Nickel (SN)



SPECIFICATIONS				
DIAMETER	5.5"	7"	9"	12"
HEIGHT	0.5"			
WATTS	6W	12W	18W	24W
INITIAL LUMENS	600LM	1400LM	2100LM	3200LM
DELIVERED LUMENS	360LM	840LM	1260LM	1920LM
ESTIMATED ANNUAL COST*	\$0.70	\$1.40	\$2.10	\$2.80
COLOUR TEMPERATURE	3000K			
CRI	80+			
DIMMING METHOD	TRIAC / ELV (ELECTRONIC LOW VOLTAGE)			
BEAM ANGLE	120°			
POWER FACTOR	0.9			
EMBEDDED MAGNET	YES			
TRIM INCLUDED	YES			
QTY PER MASTER BOX	72	48	24	12
MASTER BOX WEIGHT (KG)	27.5	26.5	20	16
ENERGY STAR	YES			
ETL	YES			
LIFE CYCLE @ 3 HRS/DAY	20 YEARS			
WARRANTY	5 YEARS RESIDENTIAL/50,000 HOURS COMMERCIAL @ L70 STANDARD			

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	AVRO			
	5.5"	7"	9"	12"
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓

**LED  
FLAT  
PANELS**

# BANSHEE PRO 0-10V

**FINISH OPTIONS**

Matte White (MW)

Matte Black (MB)

**DVP38708**

Ø: 5 3/8" x H: 1 1/2"



**DVP38718**

Ø: 7 1/8" x H: 1 1/2"



**DVP38728**

Ø: 8 7/8" x H: 1 1/2"



**DVP38738**

Ø: 11 7/8" x H: 1 1/2"



**ORDER CODES\***

FINISH	COLOUR TEMPERATURE	CRI	5"	7"	9"	12"	
MB	3000K	80CRI	DVP38708MB-3K-80	DVP38718MB-3K-80	DVP38728MB-3K-80	DVP38738MB-3K-80	
		90 CRI	DVP38708MB-3K-90	DVP38718MB-3K-90	DVP38728MB-3K-90	DVP38738MB-3K-90	
	3500K	80CRI	DVP38708MB-35K-80	DVP38718MB-35K-80	DVP38728MB-35K-80	DVP38738MB-35K-80	
		90 CRI	DVP38708MB-35K-90	DVP38718MB-35K-90	DVP38728MB-35K-90	DVP38738MB-35K-90	
	4000K	80CRI	DVP38708MB-4K-80	DVP38718MB-4K-80	DVP38728MB-4K-80	DVP38738MB-4K-80	
		90 CRI	DVP38708MB-4K-90	DVP38718MB-4K-90	DVP38728MB-4K-90	DVP38738MB-4K-90	
	MW	3000K	80CRI	DVP38708MW-3K-80	DVP38718MW-3K-80	DVP38728MW-3K-80	DVP38738MW-3K-80
			90 CRI	DVP38708MW-3K-90	DVP38718MW-3K-90	DVP38728MW-3K-90	DVP38738MW-3K-90
3500K		80CRI	DVP38708MW-35K-80	DVP38718MW-35K-80	DVP38728MW-35K-80	DVP38738MW-35K-80	
		90 CRI	DVP38708MW-35K-90	DVP38718MW-35K-90	DVP38728MW-35K-90	DVP38738MW-35K-90	
4000K		80CRI	DVP38708MW-4K-80	DVP38718MW-4K-80	DVP38728MW-4K-80	DVP38738MW-4K-80	
		90 CRI	DVP38708MW-4K-90	DVP38718MW-4K-90	DVP38728MW-4K-90	DVP38738MW-4K-90	

\* Special Order



SPECIFICATIONS								
DIAMETER	5"		7"		9"		12"	
HEIGHT	1.5"							
INPUT VOLTAGE	100-277 VAC							
WATTS	8W		12W		18W		24W	
CRI	80+	90+	80+	90+	80+	90+	80+	90+
INITIAL LUMENS <small>*at 3000K</small>	1100LM	1000LM	1920LM	1790LM	3190LM	2770LM	4280LM	3720LM
DELIVERED LUMENS <small>*at 3000K</small>	758LM	655LM	1251LM	1166LM	2083LM	1808LM	2794LM	2426LM
ESTIMATED ANNUAL COST <small>*based on 3 hrs/day, 10.65¢/kWh.</small>	\$0.96		\$1.45		\$2.17		\$2.89	
COLOUR TEMPERATURE	1CCT (3000K OR 3500K OR 4000K)*							
OPERATING TEMPERATURE	-20°C TO 45°C							
DIMMING METHOD	0-10V							
BEAM ANGLE	120°							
POWER FACTOR	0.9							
EMBEDDED MAGNET	NO							
TRIM INCLUDED	NOT APPLICABLE							
QTY PER MASTER BOX	48		36		24		12	
MASTER BOX WEIGHT (KG)	20.5		21.5		21		15	
ENERGY STAR	NO							
ETL	YES							
JAB	90+ CRI ONLY							
LIFE CYCLE @ 3 HRS/DAY	20 YEARS							
WARRANTY	5 YEARS RESIDENTIAL/50,000 HOURS COMMERCIAL @ L70 STANDARD							

\* Colour temperature available separately.

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	BANSHEE PRO			
	5"	7"	9"	12"
LUTRON DIVA 0-10V DVSTV	✓	✓	✓	✓
LUTRON VIVE POWPAK 0-10V FCJS-010	✓	✓	✓	✓



### DVP39138

L: 12" x W: 12" x H: ½"  
Finish Shown: Matte White




### DVP39148

L: 24" x W: 6" x H: 1"  
Finish Shown: Matte White



### DVP39158


L: 48" x W: 12" x H: 1"  
Finish Shown: Matte White

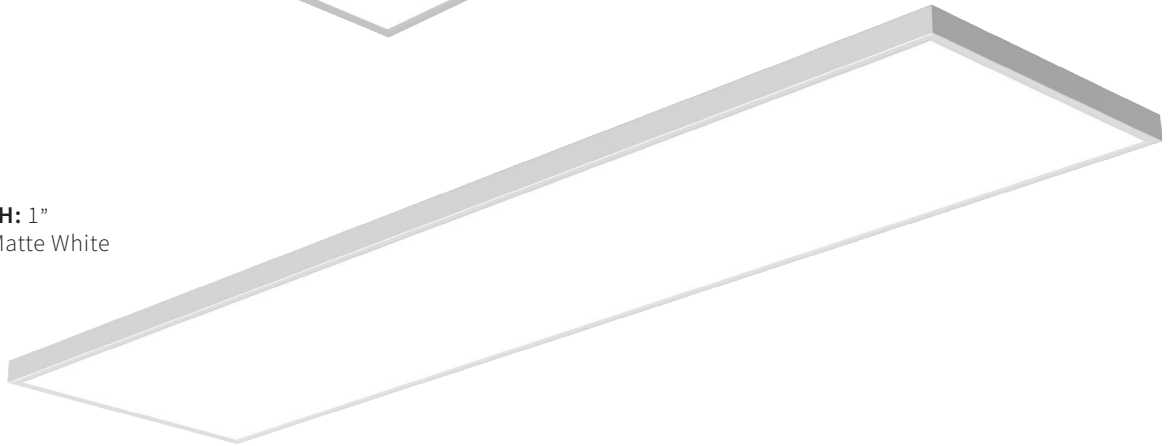

**5CCT Model**  
DVP39148 & DVP39158



**5CCT Switch  
on the back**



### ORDER CODES

FINISH	12"	24"	48"
MW	DVP39138MW+NM-3K	DVP39148MW	DVP39158MW
MB			DVP39158MB



## PACKAGING



## FINISH OPTIONS

Matte White (MW)

Matte Black (MB)



## SPECIFICATIONS

	12"	24"	48"
LENGTH	12"	24"	48"
WIDTH	12"	6"	12"
	0.5"	1"	
WATTS	24W	22W	40W
INITIAL LUMENS	3200LM	2420LM	4400LM
DELIVERED LUMENS	1920LM	1760LM	3200LM
ESTIMATED ANNUAL COST*	2.45\$	\$2.24	\$4.08
COLOUR TEMPERATURE	3000K	2700K / 3000K / 3500K / 4000K / 5000K, SWITCH ON THE BACK	
CRI	80+		
DIMMING METHOD	TRIAC / ELV (ELECTRONIC LOW VOLTAGE)		
BEAM ANGLE	120°		
POWER FACTOR	0.9		
EMBEDDED MAGNET	NO		
TRIM INCLUDED	NO		
QTY PER MASTER BOX	12	4	3
MASTER BOX WEIGHT (KG)	16.5	4.75	7.6
ENERGY STAR	NO		
ETL	YES		
LIFE CYCLE @ 3 HRS/DAY	20 YEARS		
WARRANTY	5 YEARS RESIDENTIAL/50,000 HOURS COMMERCIAL @ L70 STANDARD		

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	ELSIE		
	12"	24"	48"
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓

**DVP39808**

Ø: 5½" x H: 1/8"

Finish Shown: Matte White



**DVP39818**

Ø: 7" x H: 5/8"

Finish Shown: Matte Black



**DVP39828**

Ø: 9" x H: 5/8"

Finish Shown: Matte Black



**DVP39838**

Ø: 12" x H: 5/8"

Finish Shown: Matte White



**DVP39848**

Ø: 16" x H: 1"

Finish Shown: Matte Black



**DVP39858**

Ø: 20" x H: 1"

Finish Shown: Matte White



**5CCT Model**



**5CCT Switch  
on the side**



**ORDER CODES**

FINISH	5.5"	7"	9"	12"	16"	20"
MB	DVP39808MB+MR-5CCT	DVP39818MB+MR-5CCT	DVP39828MB+MR-5CCT	DVP39838MB+MR-5CCT	DVP39848MB+MR-5CCT	DVP39858MB+MR-5CCT
MW	DVP39808MW+NM-5CCT	DVP39818MW+NM-5CCT	DVP39828MW+NM-5CCT	DVP39838MW+NM-5CCT	DVP39848MW+NM-5CCT	DVP39858MW+NM-5CCT



**FINISH OPTIONS**

- Matte Black (MB)
- Matte White (MW)



SPECIFICATIONS						
DIAMETER	5.5"	7"	9"	12"	16"	20"
HEIGHT	0.625"				1"	
WATTS	10W	15W	18W	24W	30W	40W
INITIAL LUMENS	1130LM	1825LM	2250LM	3200LM	5000LM	6100LM
DELIVERED LUMENS	700LM	1160LM	1440LM	2040LM	3000LM	3800LM
ESTIMATED ANNUAL COST*	\$1.02	\$1.51	\$1.82	\$2.80	\$3.06	\$4.12
COLOUR TEMPERATURE	2700K / 3000K / 3500K / 4000K / 5000K, SWITCH ON THE SIDE					
CRI	80+					
DIMMING METHOD	TRIAC / ELV (ELECTRONIC LOW VOLTAGE)					
BEAM ANGLE	120°					
POWER FACTOR	0.9					
EMBEDDED MAGNET	YES (ONLY MB MODELS)				NO	
TRIM INCLUDED	NO					
QTY PER MASTER BOX	60	40	24	12	10	10
MASTER BOX WEIGHT (KG)	15	14.2	12.6	10.4	13.7	22.3
ENERGY STAR	NO					
ETL	YES					
LIFE CYCLE @ 3 HRS/DAY	20 YEARS					
WARRANTY	5 YEARS RESIDENTIAL/50,000 HOURS COMMERCIAL @ L70 STANDARD					

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	HURRICANE					
	5.5"	7"	9"	12"	16"	20"
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓	✓	✓

**LED  
FLAT  
PANELS**

# MISTRAL



## DVP38308

Ø: 5" x H: 3/4"

Finish Shown: Acrylic True Opal

### ORDER CODES

FINISH	COLOUR TEMPERATURE	5"
ATO	3000K	DVP38308ATO-3K
	4000K	DVP38308ATO-4K





## PACKAGING



## FINISH OPTIONS

Acrylic True Opal  
(ATO)

## SPECIFICATIONS

DIAMETER	5"
HEIGHT	0.75"
WATTS	10W
INITIAL LUMENS	1000LM
DELIVERED LUMENS	800LM
ESTIMATED ANNUAL COST*	\$1.02
COLOUR TEMPERATURE	1CCT (3000K OR 4000K)*
CRI	80+
DIMMING METHOD	TRIAC / ELV (ELECTRONIC LOW VOLTAGE)
BEAM ANGLE	120°
POWER FACTOR	0.9
EMBEDDED MAGNET	NO
TRIM INCLUDED	NO
QTY PER MASTER BOX	30
MASTER BOX WEIGHT (KG)	12
ENERGY STAR	YES
ETL	YES
LIFE CYCLE @ 3 HRS/DAY	20 YEARS
WARRANTY	5 YEARS RESIDENTIAL/50,000 HOURS COMMERCIAL @ L70 STANDARD

\* Colour temperature available separately.

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	MISTRAL
	5"
LEGRAND ADORNE SOFTAP ADTP703U	✓
LUTRON MAESTRO MACL-153MH	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓
LEVITON DECORA SURESLIDE®	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓
LUTRON CASETA® WIRELESS	✓
LEVITON DECORA ROCKER SLIDE	✓
LEVITON DECORA SMART™	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓

**DVP39708**

Ø: 5½" x H: ¾"

**Finish Shown:** Matte Black with embedded magnet and trim included



**DVP39718**

Ø: 7" x H: ¾"

**Finish Shown:** Matte White with embedded magnet and trim included



**DVP39728**

Ø: 9" x H: ¾"


**Finish Shown:** Matte Black with embedded magnet and trim included



**DVP39738**

Ø: 12" x H: ¾"

**Finish Shown:** Matte White with embedded magnet and trim included

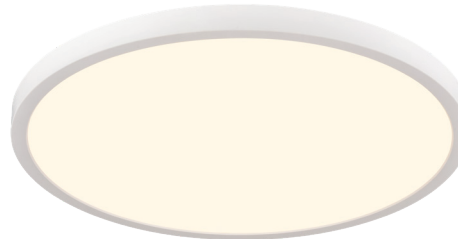

**ORDER CODES**

FINISH	5.5"	7"	9"	12"
MB	DVP39708MB-3K	DVP39718MB-3K	DVP39728MB-3K	DVP39738MB-3K
MW	DVP39708MW-3K	DVP39718MW-3K	DVP39728MW-3K	DVP39738MW-3K



**FINISH OPTIONS**

- Matte Black (MB)
- Matte White (MW)



SPECIFICATIONS				
DIAMETER	5.5"	7"	9"	12"
HEIGHT	0.75"			
WATTS	8W	14W	20W	25W
INITIAL LUMENS	800LM	1640LM	2340LM	3340LM
DELIVERED LUMENS	480LM	980LM	1400LM	2000LM
ESTIMATED ANNUAL COST*	\$0.93	\$1.63	\$2.33	\$2.92
COLOUR TEMPERATURE	3000K			
CRI	80+			
DIMMING METHOD	TRIAC / ELV (ELECTRONIC LOW VOLTAGE)			
BEAM ANGLE	120°			
POWER FACTOR	0.9			
EMBEDDED MAGNET	NO			
TRIM INCLUDED	NO			
QTY PER MASTER BOX	60	40	20	10
MASTER BOX WEIGHT (KG)	18.6	20.5	15	12.5
ENERGY STAR	YES			
ETL	YES			
LIFE CYCLE @ 3 HRS/DAY	20 YEARS			
WARRANTY	5 YEARS RESIDENTIAL/50,000 HOURS COMMERCIAL @ L70 STANDARD			

**DIMMABILITY DATA / DONNÉES DE GRADATION**

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	POLARIS			
	5.5"	7"	9"	12"
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓



## PACKAGING



## FINISH OPTIONS

Matte Black (MB)

Matte White (MW)



## SPECIFICATIONS


DIAMETER	5.5"	7"	9"	12"
HEIGHT	0.75"			
WATTS	8W	14W	20W	25W
INITIAL LUMENS	800LM	1640LM	2340LM	3340LM
DELIVERED LUMENS	480LM	980LM	1400LM	2000LM
ESTIMATED ANNUAL COST*	\$0.93	\$1.63	\$2.33	\$2.92
COLOUR TEMPERATURE	2700K / 3000K / 3500K / 4000K / 5000K, SWITCH ON THE BACK			
CRI	80+			
DIMMING METHOD	TRIAC / ELV (ELECTRONIC LOW VOLTAGE)			
BEAM ANGLE	120°			
POWER FACTOR	0.9			
EMBEDDED MAGNET	NO			
TRIM INCLUDED	NO			
QTY PER MASTER BOX	60	40	20	10
MASTER BOX WEIGHT (KG)	18.6	20.5	15	12.5
ENERGY STAR	YES			
ETL	YES			
LIFE CYCLE @ 3 HRS/DAY	20 YEARS			
WARRANTY	5 YEARS RESIDENTIAL/50,000 HOURS COMMERCIAL @ L70 STANDARD			

## DIMMABILITY DATA / DONNÉES DE GRADATION

- ✓ SMOOTH AND CONSISTENT DIMMING
- X NOT RECOMMENDED
- INCONSISTENT DIMMING TRANSITION
- ^ POTENTIAL STROBING AT THIS LEVEL
- MIN LOSES DIMMABILITY BELOW THIS LEVEL
- MAX MAXIMUM LUMENS OUTPUT

	TYPHOON			
	5.5"	7"	9"	12"
LEGRAND ADORNE SOFTAP ADTP703U	✓	✓	✓	✓
LUTRON MAESTRO MACL-153MH	✓	✓	✓	✓
LUTRON DIVA® / DIVA® C.L DVWCL-153PH	✓	✓	✓	✓
LEVITON DECORA SURESLIDE®	✓	✓	✓	✓
LUTRON C.L SKYLARK CONTOUR CTL -153P	✓	✓	✓	✓
LUTRON CASETA® WIRELESS	✓	✓	✓	✓
LEVITON DECORA ROCKER SLIDE	✓	✓	✓	✓
LEVITON DECORA SMART™	✓	✓	✓	✓
LUTRON MAESTRO PRO MA-PRO-WH	✓	✓	✓	✓

# TRIM REFERENCE GUIDE



AVRO	BRASS	CHROME	SATIN NICKEL	CERULIAN BLUE	ROSE QUARTZ	ULTIMATE GREY
5.3"	STR0404BR	STR0404CH	STR0404SN	-	-	-
7"	STR0405BR	STR0405CH	STR0405SN	-	-	-
9"	STR0461BR	STR0461CH	STR0461SN	STR0461CB	STR0461RQ	STR0461UG
12"	STR0407BR	STR0407CH	STR0407SN	STR0407CB	STR0407RQ	STR0407UG



HURRICANE	BRASS	CHROME	SATIN NICKEL
5.3"	STR0471BR	STR0471CH	STR0471SN
7"	STR0472BR	STR0472CH	STR0472SN
9"	STR0473BR	STR0473CH	STR0473SN
12"	STR0474BR	STR0474CH	STR0474SN

**LED  
FLAT  
PANELS**

# TYPHOON

## DVP39608

Ø: 5½" x H: ¾"

Finish Shown: Matte White



## DVP39618

Ø: 7" x H: ¾"

Finish Shown: Matte Black



## DVP39628

Ø: 9" x H: ¾"

Finish Shown: Matte White



## DVP39638

Ø: 12" x H: ¾"


Finish Shown: Matte Black



### 5CCT Model



### 5CCT Switch on the back



### ORDER CODES

FINISH	5.5"	7"	9"	12"
MB	DVP39608MB	DVP39618MB	DVP39628MB	DVP39638MB
MW	DVP39608MW	DVP39618MW	DVP39628MW	DVP39638MW

# INDEX

D30138A.....	17	D90148B.....	70	DS1827W6A.....	25	DVP38918.....	90
D30148A.....	17	D90158B.....	70	DS1830W6A.....	25	DVP38928.....	90
D31128A.....	10	D91138B.....	71	DS1840W6A.....	25	DVP38938.....	90
D31138A.....	10	D92138B.....	72	DS1850W6A.....	25	DVP39138.....	94
D31148A.....	10	D92148B.....	72	DST19CCTW8B.....	46	DVP39148.....	94
D31158A.....	10	D92158B.....	72	DST1730W8A.....	44	DVP39158.....	94
D32238A.....	14	D93138A.....	73	DST1740W8A.....	44	DVP39608.....	102
D32248A.....	14	D93148A.....	73	DST1927C7A.....	47	DVP39618.....	102
D33129A.....	13	DA19CCTW8B.....	34	DST1930W8A.....	48	DVP39628.....	102
D33138A.....	11	DA19CCTWP8B.....	35	DST1935C7A.....	47	DVP39638.....	102
D33139A.....	13	DA19CCTWP8T.....	33	DST1940W8A.....	48	DVP39708.....	100
D33148A.....	11	DA1530C6A.....	32	DST1950W8A.....	48	DVP39718.....	100
D33149A.....	13	DA1927C8A.....	36	DT630W6A.....	28	DVP39728.....	100
D33238A.....	16	DA1927P8A.....	37	DT640W6A.....	28	DVP39738.....	100
D33248A.....	16	DA1930C8A.....	36	DT650W6A.....	28	DVP39808.....	96
D34138A.....	79	DA1930P8A.....	37	DT1030LW15A.....	57	DVP39818.....	96
D40238A.....	19	DA1930W8A.....	38	DT1030MW8A.....	55	DVP39828.....	96
D40248A.....	19	DA1930W10A.....	40	DT1030P4A.....	53	DVP39838.....	96
D41118A.....	18	DA1930W12A.....	41	DT1030SW4A.....	52	DVP39848.....	96
D51138A.....	77	DA1930WP10A.....	39	DT1040LW15A.....	57	DVP39858.....	96
D51148A.....	77	DA1930WP12A.....	42	DT1040MW8A.....	55	DVT10MC50A.....	51
D51239A.....	78	DA1935C8A.....	36	DT1040SW4A.....	52	DVT14MC27A.....	58
D52239A.....	74	DA1935P8A.....	37	DT1427C12A.....	60	DVT14MC27B.....	60
D53138A.....	75	DA1940C8A.....	36	DT1430P11A.....	61	DVT14MC40B.....	60
D53238A.....	76	DA1940P8A.....	37	DT1440C8A.....	58	DVT14MT40A.....	59
D53248A.....	76	DA1940W8A.....	38	DT1440C12A.....	60	STR0404BR.....	104
D61118A.....	43	DA1940W10A.....	40	DVA15MC27A.....	32	STR0404CH.....	104
D61128A.....	43	DA1950C8A.....	36	DVA15MC30A.....	32	STR0404SN.....	104
D62118A.....	47	DA1950W8A.....	38	DVA15MC40A.....	32	STR0405BR.....	104
D62138A.....	47	DA1950W10A.....	40	DVA15MC50A.....	32	STR0405CH.....	104
D62158A.....	47	DC3530W6A.....	15	DVCT24CC27H.....	79	STR0405SN.....	104
D63138A.....	49	DC3535W6A.....	15	DVCT24CC40H.....	79	STR0407BR.....	104
D63148A.....	49	DC3540W6A.....	15	DVCT24CC50H.....	79	STR0407CB.....	104
D64238A.....	50	DC3550W6A.....	15	DVG9BB27A.....	73	STR0407CH.....	104
D66138A.....	82	DG927C5B.....	72	DVG9BB50A.....	73	STR0407RQ.....	104
D66148A.....	82	DG940F4A.....	71	DVG25MC50A.....	64	STR0407SN.....	104
D70238A.....	59	DG1630W6A.....	20	DVIA2609.....	85	STR0407UG.....	104
D72018A.....	51	DG1630WP4A.....	21	DVIA2610.....	85	STR0461BR.....	104
D72028A.....	51	DG1640W6A.....	20	DVIA2612.....	85	STR0461CB.....	104
D73238A.....	58	DG1640WP4A.....	21	DVIBA1960CARB.....	45	STR0461CH.....	104
D74238A.....	60	DG1650W6A.....	20	DVIBLEDCAT10L2R... ..	56	STR0461RQ.....	104
D75129A.....	27	DG2530W10A.....	62	DVIBULBDISPECT.....	85	STR0461SN.....	104
D75139A.....	27	DG2530WP10A.....	63	DVIBULBSUITCASE... ..	85	STR0461UG.....	104
D75149A.....	27	DG2540W10A.....	62	DVILG2530G6A.....	65	STR0471BR.....	104
D76129A.....	30	DG2540WP10A.....	63	DVILM1640M5.....	75	STR0471CH.....	104
D76139A.....	30	DG4030W10A.....	66	DVLA165MC30A.....	68	STR0471SN.....	104
D76149A.....	30	DG4030WP10A.....	67	DVLA165MT30A.....	69	STR0472BR.....	104
D77129A.....	54	DMPA1930C8.....	80	DVLC35CC27C.....	12	STR0472CH.....	104
D80138A.....	24	DMPA1930C8ND.....	81	DVLS18CC27A.....	24	STR0472SN.....	104
D81118A.....	22	DMPA1930P8.....	80	DVLS18CC40A.....	24	STR0473BR.....	104
D81138A.....	22	DMPA1930P8ND.....	81	DVLS18CC50A.....	24	STR0473CH.....	104
D82138A.....	31	DMPA1940C8.....	80	DVLT20CC40A.....	31	STR0473SN.....	104
D83129A.....	26	DMPA1940C8ND.....	81	DVP38308.....	98	STR0474BR.....	104
D83139A.....	26	DMPA1940P8.....	80	DVP38708.....	92	STR0474CH.....	104
D83149A.....	26	DMPA1940P8ND.....	81	DVP38718.....	92	STR0474SN.....	104
D85139A.....	29	DMPST1930W8.....	83	DVP38728.....	92		
D85149A.....	29	DMPST1940W8.....	83	DVP38738.....	92		
D90138B.....	70	DMR1627C6A.....	76	DVP38908.....	90		

# ABOUT DVI'S BULB WARRANTIES

Over the past year, our engineering team has conducted a detailed analysis of bulb quality, examining defect rates and common manufacturing issues across individual bulb types. The result is a more logical, technology-aligned warranty structure that reflects the unique characteristics and performance of each bulb configuration.

## **IVORY FILAMENT BULBS (MEDIUM BASE & CANDELABRA)**

DVI's new ivory filament bulbs are not only distinguished by their color, but also by their advanced 7th-generation electronics. These run at lower temperatures, improving longevity—especially in commercial applications.

**Warranty: 3 years / 20,000 hours**

## **SPECIALTY CANDELABRA & MEDIUM BASE BULBS**

Lipstick, spear, marshmallow, and other specialty bulbs use older wattage/lumen profiles but feature enhanced engineering and superior electronics compared to our yellow filament bulbs.

**Warranty: 3 years / 20,000 hours**

## **YELLOW FILAMENT BULBS (MEDIUM BASE & CANDELABRA)**

Most yellow filament models use 5th or 6th-generation technology, with some 4th-generation units still in circulation. These are proven in residential settings but show diminished performance in commercial use, with L70 degradation typically between 15,000–20,000 hours.

**Warranty: 3 years / 12,000 hours**

## **MULTI-PACK A19 (MEDIUM BASE)**

Designed for builder-grade applications, these bulbs use more cost-effective electronics and filaments, resulting in a shorter lifespan.

**Warranty: 2 years / 5,000 hours**

## **CARBON ST19/ST64 “EDISON” BULBS**

These traditional incandescent bulbs use a heated copper wire in a gas-filled ampoule. They contain no electronics or LED components and may last for years—or burn out within months.

**Warranty: 1 year / 2,500 hours**

## **G9 BULBS**

Due to their compact size, G9 bulbs are prone to heat buildup, which shortens their lifespan. Lower wattage models operate at cooler temperatures and last longer. Inverted G9s, regardless of power, have less than half the lifespan of upright versions.

**Warranty:**

- Low Power G9 – 3 years / 12,000 hours
- High Power G9 – 2 years / 8,000 hours

## **GU10 / MR16 / HR16 BULBS**

Performance varies significantly with build quality. Glass-bodied versions use lower-grade electronics, while aluminum-bodied versions—suitable for enclosed fixtures—offer superior durability, with over 95% exceeding 20,000 hours at L70 performance.

**Warranty:**

- Glass Versions – 3 years / 7,500 hours
- Aluminum Versions – 3 years / 20,000 hours



## **DVI LIGHTING INC.**

### **Toronto Distribution Center & Office**

120 Great Gulf Drive  
Concord, ON L4K 5W1, Canada

**Toll Free** 1.855.DVI.LITE (1.855.384.5483)

T 905.660.2381

customerservice@dvi.lighting  
dvcanada.com

**DVI**<sup>®</sup>  
LIGHTING

Follow us:

